




Your Experienced Vendor!

FOR YOUR IT & NETWORK DEVICES **19"**
FULL PROTECTION



✓  70 product families

✓  800 different size product

✓  8000 tons sheet steel

✓  40.000 stock refereces

✓  3000 trucks per year

✓  20.000 sqm factory




ecoqube



Are you tracking the carbon footprint of your data center?



ECO-Qube Project support digital infrastructures to comply with the EU Green Deal and Carbon Border Adjustment Mechanism.

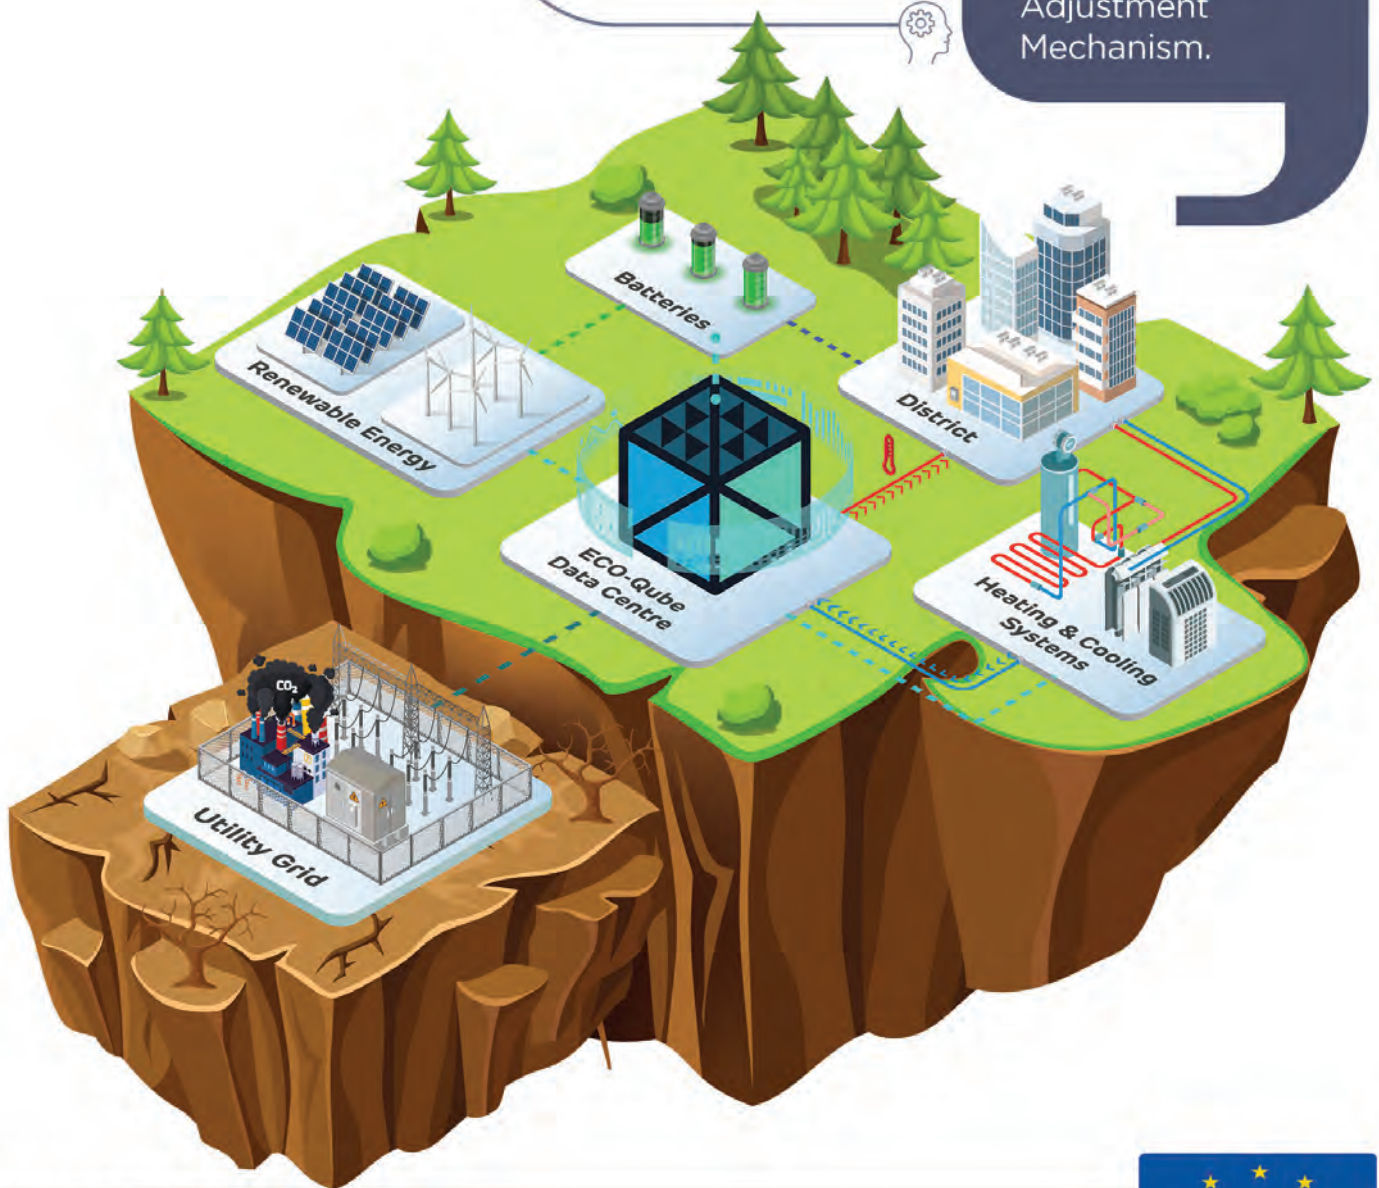

"This project has received funding from the European Union's Horizon 2020 research and innovation programme under grant agreement No 956059."



19" DYNAmic Series

Free Standing Cabinets / Width: 600 mm.



Please scan the QR code to view the pdf catalog online.



- * Nanotechnology painting with 500 hrs. salt test results, corrosion resistance
- * Strong steel construction
- * Aesthetic and decorative

DYNAmic Series Free Standing Cabinet		
Width (mm)	Height (U: 44,45 mm)	Depth (mm)
600	12U	600 800 1000 1200
	16U	
	20U	
	22U	
	26U	
	32U	
	36U	
	39U	
	42U	
	45U	
	47U	



Load Carrying Capacity: 600 kgs.

* Handle Lock



* Wider Cable Access Holes



* Cooling with Fans




* Marked 19" Profiles



* Perforated Door Option



* Perforated Door Option

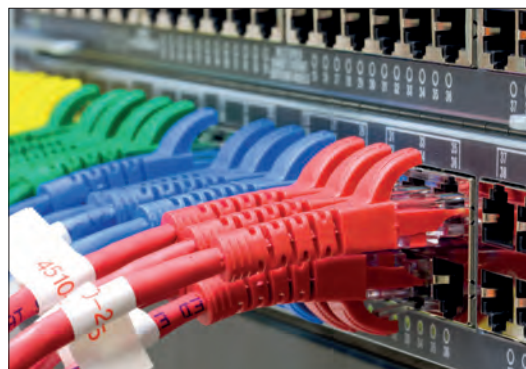


19" DYNAmic Series

Free Standing Cabinets / Width: 800 mm.



Please scan the QR code to view the pdf catalog online.

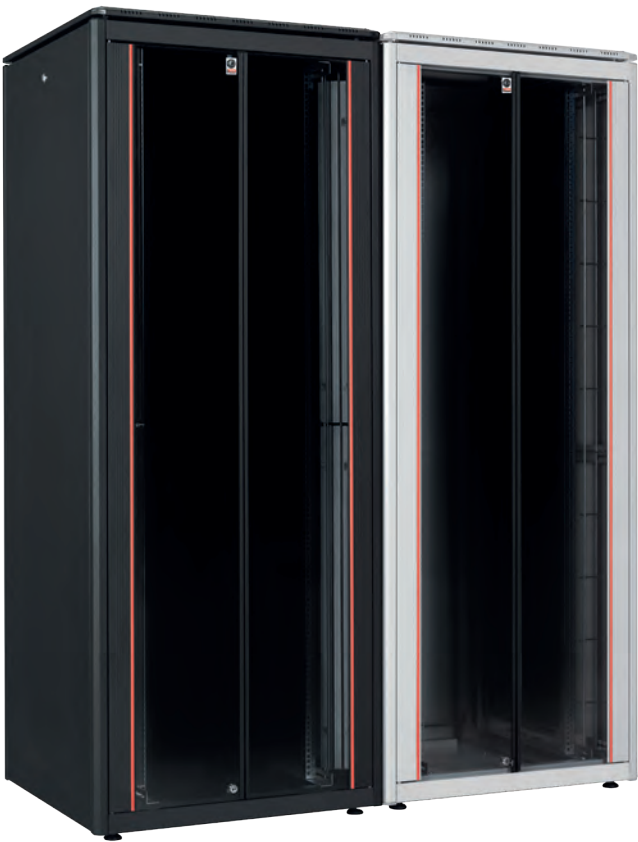

- * Cable-friendly
- * More volume
- * Professional Cabling

DYNAmic Series Free Standing Cabinet		
Width (mm)	Height (U: 44,45 mm)	Depth (mm)
800	22U	600
	26U	
	32U	
	36U	
	39U	
	42U	
	45U	
	47U	



Load Carrying Capacity: 600 kgs.

* Left and Right Vertical Cable Management Panels



* Cable Entry From Top



* Wider Cable Access Hole



* Left and Right Cable Management Panel with Cover

19" DYNAmic Basic Series

Free Standing Cabinets



Please scan the QR code to view the pdf catalog online.



Flat Pack Design, Super Economy in Logistics

DYNAmic Basic Series Free Standing Cabinet		
Width (mm)	Height (U: 44,45 mm)	Depth (mm)
600	22U	600
800	26U	800
	32U	1000
	36U	
	42U	
	47U	

DYNAmic Basic Series Server Free Standing Cabinet		
Width (mm)	Height (U: 44,45 mm)	Depth (mm)
600	26U	1000
800	36U	
	42U	
	47U	



Load Carrying Capacity: 600 kgs.



19" DYNAmax Series

Free Standing Server Cabinets



Please scan the QR code to view the pdf catalog online.




19" DYNAmax Series Free Standing Server Cabinets		
Width (mm)	Height (U: 44,45 mm)	Depth (mm)
600	12U 26U 36U 42U 45U 47U	1000



Load Carrying Capacity: 1000 kgs.

* Curved, Aesthetic and Monoblock Welded Front Door

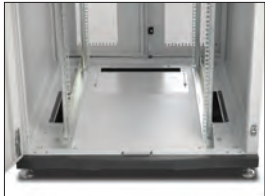

* **STURDY**

* **%63 perforation**

* **Possible with glass front door**



19" DYNAmax Series Free Standing Server Cabinets		
Width (mm)	Height (U: 44,45 mm)	Depth (mm)
800	36U 42U 45U 47U	1000 1200



19" SOUNDproof

Free Standing Cabinets




Please scan the QR code to view the pdf catalog online.

17U



- Convenient for offices and indoor usage
- Very silent

19" SOUNDproof Free Standing Cabinets		
Width (mm)	Height (U: 44,45 mm)	Depth (mm)
750	17U 32U 42U	1130






Please scan the QR code to view the product video online.



Static Load Capacity: 1500 kgs.
Dynamic Load Capacity: 750 kg.
(on castors)

32U



The Casters and levelling feet are totally recessed. High quality melamine coated chipboard; The Wood finished options: M-Maple, C-Cherry and S-Black (Maple is standard stock chipboard option).

*Please contact us for your C-Cherry and B-Black wood orders.

42U



19" DYNAframe Series

High Density Open Frame System Racks



Please scan the QR code to view the pdf catalog online.



- * Professional Cabling Solutions
- * Possible To Use Special Vertical Organiser



Load Carrying Capacity: 600 kgs.

19" DYNAframe Open Frame System Racks Double Frames d:80 Frame Unit W=530 mm D=670 mm

Width (mm)	Height (U: 44,45 mm)	Depth (mm)
530	27U 36U 42U 45U 48U	670

19" DYNAframe Open Frame System Racks Double Frames d:80 Frame Unit W=530 mm D=870 mm

Width (mm)	Height (U: 44,45 mm)	Depth (mm)
530	27U 36U 42U 45U 48U	870

19" DYNAframe Open Frame System Racks Single Frames d:80 Frame Unit W=530 mm D=380 mm

Width (mm)	Height (U: 44,45 mm)	Depth (mm)
530	27U 36U 42U 45U 48U	380

19" DYNAframe Open Frame System Racks Single Frames d:80 Frame Unit W=530 mm D=460 mm

Width (mm)	Height (U: 44,45 mm)	Depth (mm)
530	27U 36U 42U 45U 48U	460

19" DYNAframe Open Frame System Racks Double Frames d:80 Frame Unit W=530 mm D=1070 mm

Width (mm)	Height (U: 44,45 mm)	Depth (mm)
530	27U 36U 42U 45U 48U	1070



19" CK-Line Series

Free Standing Cabinets



Please scan the QR code to view the pdf catalog online.



19" CK Line Free Standing Cabinets		
Width (mm)	Height (U: 44,45 mm)	Depth (mm)
600	12U	600 800 1000
	16U	
	20U	
	22U	
	26U	
	32U	
	36U	
	42U	




Load Carrying Capacity: 600 kgs.

19" CK Line Free Standing Cabinets		
Width (mm)	Height (U: 44,45 mm)	Depth (mm)
800	32U	800 1000
	36U	
	42U	



19" CK Line Free Standing Server Cabinets		
Width (mm)	Height (U: 44,45 mm)	Depth (mm)
600 800	22U	1000
	26U	
	32U	
	36U	
	42U	

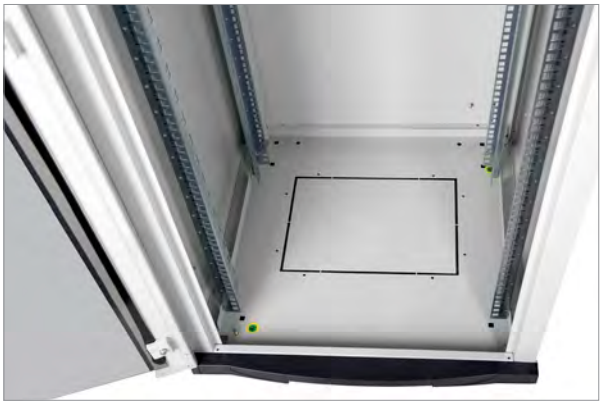

19" HYPERline Series

Free Standing Cabinets



Please scan the QR code to view the pdf catalog online.



HYPERline Series Free Standing Networking enclosures/cabinets, designed for disassembled flat-packed shipments for superior logistics advantages and cost savings.

HYPERline has Fast, Easy Assembly process with reusable packaging to save costs.



Load Carrying Capacity: 600 kgs.

19" HYPERline Series Free Standing Cabinets		
Width (mm)	Height (U: 44,45 mm)	Depth (mm)
600	26U	600
	32U	800
	36U	1000
	42U	1200
	47U	1200

19" HYPERline Series Free Standing Cabinets		
Width (mm)	Height (U: 44,45 mm)	Depth (mm)
800	26U	800
	32U	1000
	36U	1200
	42U	1200
	47U	1200

> 26U to 47U Heights






Up to 26U Height



8 pcs in 2 palette/crate

4 pcs per palette/crate



19" Pandora Series

Free Standing Cabinets


Flat Pack Design, Super Economy in Logistics



Please scan the QR code to view the pdf catalog online.



Mixed Size




42U W=800mm D=800mm
Frame and Side Panel KIT

42U W=800mm D=800mm
Front / Rear Door / Panel SET



20
pcs.
42U
W800mm
D800mm

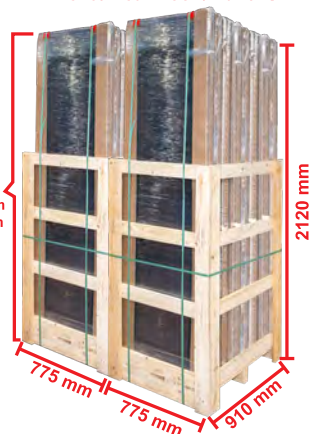

19" Pandora Series Free Standing Cabinets

Width (mm)	Height (U: 44,45 mm)	Depth (mm)
600	22U 26U 32U 36U 42U 47U	1000

19" Pandora Series Free Standing Cabinets

Width (mm)	Height (U: 44,45 mm)	Depth (mm)
600	42U 47U	1200

19" Pandora Series Free Standing Cabinets

Width (mm)	Height (U: 44,45 mm)	Depth (mm)
800	26U 32U 36U 42U 47U	800

19" Pandora Series Free Standing Cabinets

Width (mm)	Height (U: 44,45 mm)	Depth (mm)
800	42U 47U	1000 1200



Please scan the QR code to view the product video online.



Load Carrying Capacity: 1000 kgs.

19" Pandora Series Free Standing Cabinets

Width (mm)	Height (U: 44,45 mm)	Depth (mm)
600	16U 20U 22U 26U 32U 36U 42U 47U	600 800



19" SAFEbox IP55

Free Standing Enclosures



Please scan the QR code to view the pdf catalog online.



19" SAFEbox IP55 Indoor Free Standing Cabinets		
Width (mm)	Height (U: 44,45 mm)	Depth (mm)
600	32U 36U 42U	450 600

19" SAFEbox IP55 Outdoor Free Standing Cabinets		
Width (mm)	Height (U: 44,45 mm)	Depth (mm)
600	32U 36U 42U	450 600

19" SAFEbox IP55 Outdoor Double Skin Free Standing Cabinets		
Width (mm)	Height (U: 44,45 mm)	Depth (mm)
600	32U 36U 42U	450 600



Load Carrying Capacity: 600 kgs.



19" IP65 Outdoor Cabinet

Free Standing Enclosures



Please scan the QR code to view the pdf catalog online.



19" IP65 Outdoor Cabinets		
Width (mm)	Height (U: 44,45 mm)	Depth (mm)
600	9U	650 800
	12U	
	16U	
	20U	
	22U	
	24U	
	26U	



Load Carrying Capacity: 500 kgs.



19" AVS Series

Audio Video System Cabinets



Please scan the QR code to view the pdf catalog online.



19" AVS Series Audio Video System Cabinets		
Width (mm)	Height (U: 44,45 mm)	Depth (mm)
557	24U 36U 42U	470



Load Carrying Capacity: 400 kgs.



19" NETbox Series

Wall Mounting Cabinets



Please scan the QR code to view the pdf catalog online.



Load Carrying Capacity: 80 kgs.



19" NETbox Wall Mounting Cabinets

Width (mm)	Height (U: 44,45 mm)	Depth (mm)
600	7U 9U 12U 16U 20U	450 600




19" PROline Series

Wall Mounting Cabinets



Please scan the QR code to view the pdf catalog online.

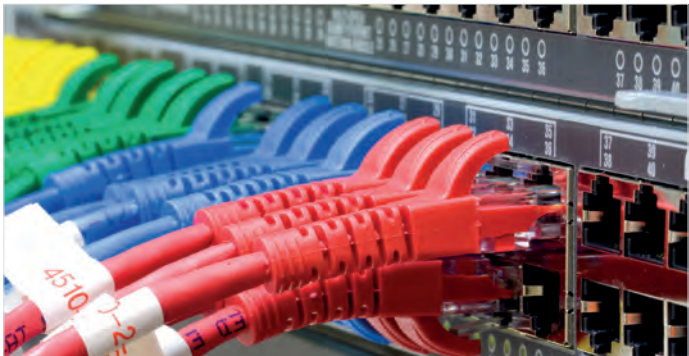

Load Carrying Capacity: 100 kgs.



19" PROline Wall Mounting Cabinets		
Width (mm)	Height (U: 44,45 mm)	Depth (mm)
600	7U	450 600
	9U	
	12U	
	16U	
	20U	



19" WB PROlineB New Series

Wall Mounting Cabinets



Please scan the QR code to view the pdf catalog online.



Please scan the QR code to view the product video online.



Load Carrying Capacity: 80 kgs.



19" WB PROlineB Wall Mounting Cabinets		
Width (mm)	Height (U: 44,45 mm)	Depth (mm)
600	4U	450
	6U	
	9U	
	12U	
	15U	
	18U	



19" STB Security Box Series

Wall Mounting Cabinets



Please scan the QR code to view the pdf catalog online.



Please scan the QR code to view the product video online.



Load Carrying Capacity: 50 kgs.

19" STB Security Box Series Wall Mounting Cabinets		
Width (mm)	Height (U: 44,45 mm)	Depth (mm)
542	4U	400
	7U	
	9U	
	12U	



19" and 10" NETbox SOHO Network

Wall Mounting Cabinets



► Flat Pack Design, Super Economy in Logistics





Please scan the QR code to view the pdf catalog online.



Load Carrying Capacity: 100 kgs.

19" and 10" NETbox SOHO Network Wall Mounting Cabinets		
Width (mm)	Height (U: 44,45 mm)	Depth (mm)
540	7U	300

19" and 10" NETbox SOHO Network Wall Mounting Cabinets		
Width (mm)	Height (U: 44,45 mm)	Depth (mm)
540	07	400
	9U	500
	12U	600

	7U, 9U, 12U Heights D300/400 mm Printed Box	7U, 9U, 12U Heights D500/600 mm Neutral White Box
	50 pcs 	50 pcs 
	50 pcs 	50 pcs 
	100 pcs	100 pcs



10" Pandora SOHO Network

Wall Mounting Cabinets

Flat Pack Design, Super Economy in Logistics



Please scan the QR code to view the pdf catalog online.



Please scan the QR code to view the product video online.



Load Carrying Capacity: 20 kgs.

10" Pandora SOHO Network Wall Mounting Cabinets

Width (mm)	Height (U: 44,45 mm)	Depth (mm)
316	6U 9U 12U	298



19" NETbox HOME Series

Wall Mounting Cabinets



Please scan the QR code to view the pdf catalog online.



Load Carrying Capacity: 80 kgs.

19" NETbox HOME Wall Mounting Cabinets		
Width (mm)	Height (U: 44,45 mm)	Depth (mm)
600	6U	150
	9U	300
	12U	300



19" EURObox Series

Wall Mounting Cabinets




Please scan the QR code to view the pdf catalog online.



Load Carrying Capacity: 60 kgs.



19" EURObox Wall Mounting Cabinets		
Width (mm)	Height (U: 44,45 mm)	Depth (mm)
540	7U	450 600
	9U	
	12U	
	16U	

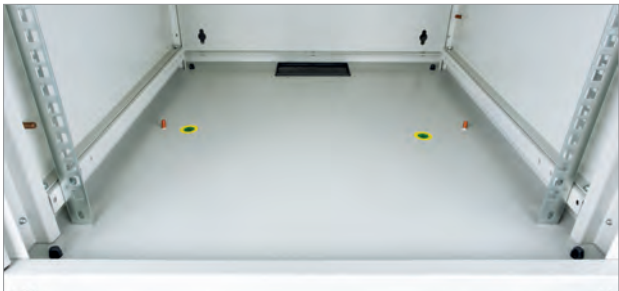

19" ANTI-VANDAL Theft Proof Security IT Network Cabinets



Please scan the QR code to view the pdf catalog online.



Mechanical Locking



Mechanic and Electronic Keypad Locking



Load Carrying Capacity: 200 kgs.

19" ANTI-VANDAL Theft Proof Security IT Network Cabinets		
Width (mm)	Height (U: 44,45 mm)	Depth (mm)
600	7U 9U 12U	600



Mechanical Locking
View From Inside



Mechanic and Electronic Keypad Locking
View From Inside

19" SLIMbox Series

Wall Mounting Cabinets



Please scan the QR code to view the pdf catalog online.



Hinged Cover
Model 1



Load Carrying Capacity: 40 kgs.



Mechanically Snap
Fitting Cover Model 2

19" SLIMbox Wall Mounting Cabinets		
Width (mm)	Height (U: 44,45 mm)	Depth (mm)
500	3U+2U=5U	475 760



19" SLIMbox Series

Wall Mounting Distribution Racks

W600-D200 mm




Please scan the QR code to view the pdf catalog online.




Load Carrying Capacity: 100 kgs.

19" ANTI-VANDAL Theft Proof Security IT Network Cabinets

Width (mm)	Description	Depth (mm)
600	3U Vertical Assembly + 3U Horizontal Assembly	200

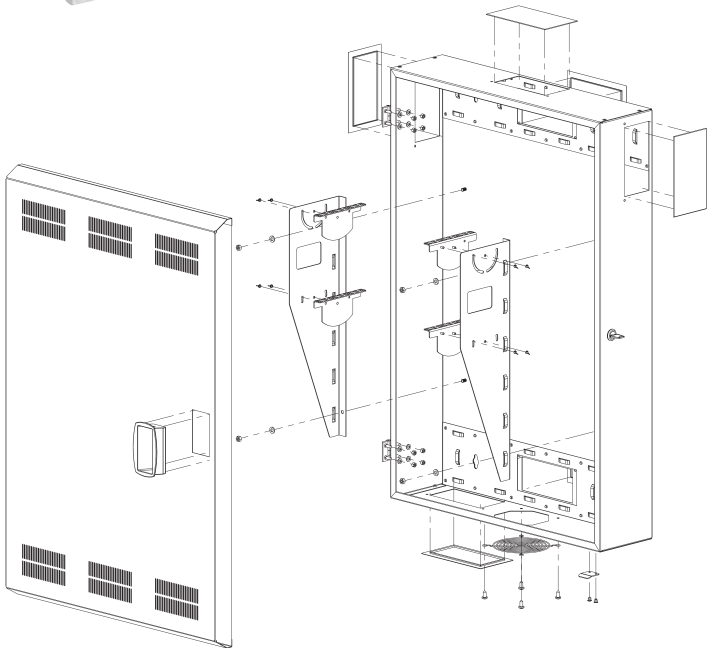

Exploded view

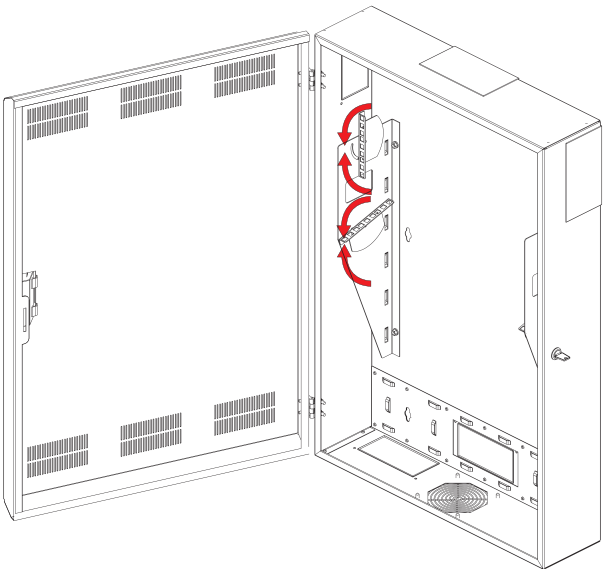

Both rack rails can be adjusted 100°

19" SLIMbox Series

Wall Mounting W500 mm Server Racks




Please scan the QR code to view the pdf catalog online.



19" SLIMbox Series Wall Mounting W500 mm Server Racks		
Width (mm)	Height (U: 44,45 mm)	Depth (mm)
500	4U 6U	310 400




Load Carrying Capacity: 100 kgs.

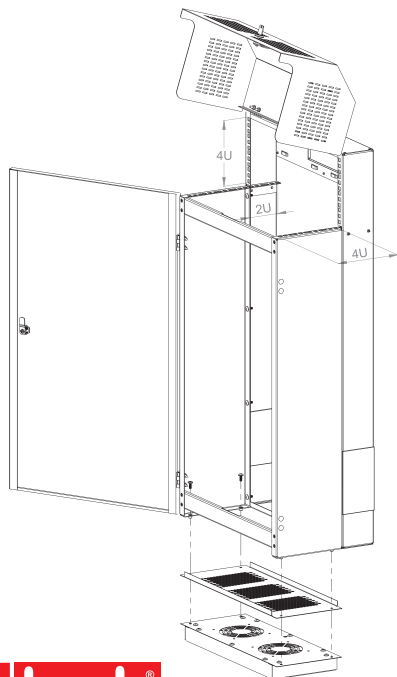


Option 1

Ventilated panels comes along with the product package as standard shipping configuration



Option 2

220V- 2 way Fan including 0-35°C adjustable Thermostat integrated Fan Module is and accessory

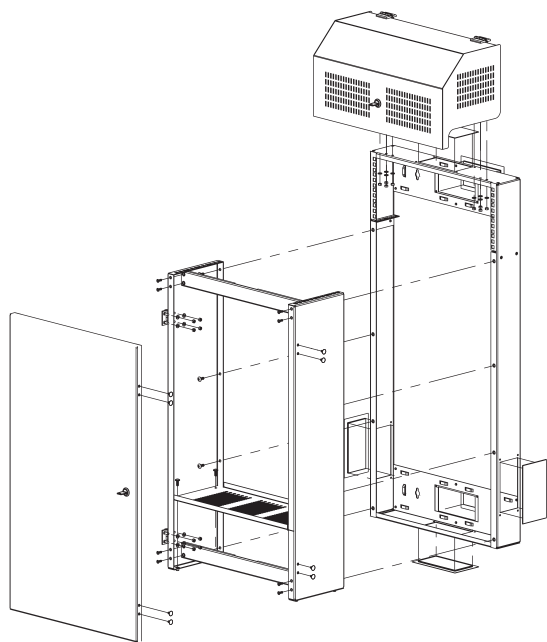

19" SLIMbox Series

Flush and Surface Wall Mounting

Tilt Out Racks W600 mm



Please scan the QR code to view the pdf catalog online.



19" SLIMBox Series Flush Mounting Cabinet W600 mm



Width (mm)	Height (U: 44,45 mm)	Depth (mm)
600	778	127

19" SLIMBox Series Surface Mounting Cabinet W600 mm



Width (mm)	Height (U: 44,45 mm)	Depth (mm)
600	750	127



Load Carrying Capacity: 100 kgs.

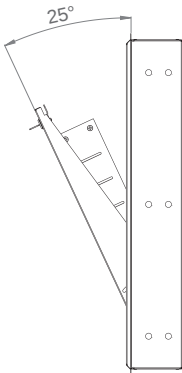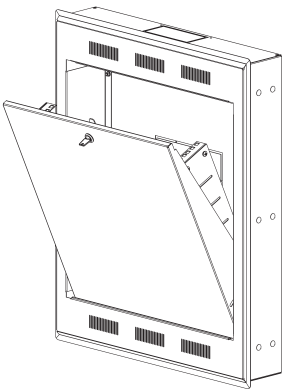

Open in operation position: 25°
First stopper position

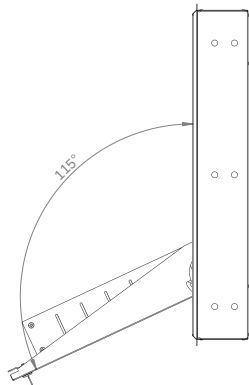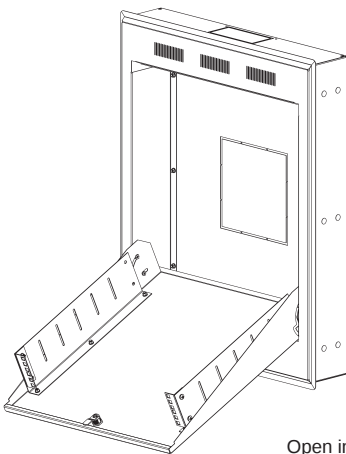

Open in service position: 115°
Second stopper position

19" SLIMbox Series

Wall Mounting Racks W640 mm

(Slim Design)



Please scan the QR code to view the pdf catalog online.




19" SLIMBox Series Wall Mounting Cabinet W640 mm (SLIM Design)

Width (mm)	Height (U: 44,45 mm)	Depth (mm)
640	800	220 309




Load Carrying Capacity: 100 kgs.



OPTION 1



Front view backpan - Vertical equipment
Assembly 60 mm sliding up-down

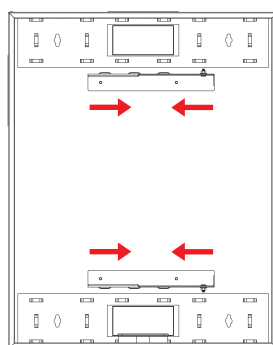

OPTION 2

Front view backpan - Horizontal equipment
Assembly 60 mm sliding top-down

Rack rails can be easily mounted either vertical or horizontal. This option allows to have more space inside the rack for additional different equipment usage.

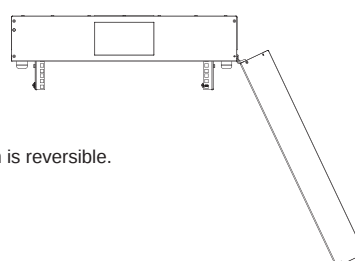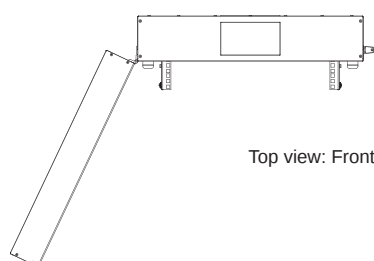

Top view: Front door swinging position is reversible.

19" SAFEbox IP55

Indoor-Outdoor Cabinets
Enclosures and Accessories



Please scan the QR code to view the pdf catalog online.



19" SAFEbox IP55 Indoor/Outdoor Free Standing Cabinets		
Width (mm)	Height (U: 44,45 mm)	Depth (mm)
600	7U	450/600
	9U	
	12U	
	16U	
	20U	
	22U	
	24U	
	26U	



Please scan the QR code to view the product video online.



Load Carrying Capacity: 100 kgs.



SBM Series

Next Generation

Field Enclosure / Cabinet IP66



Please scan the QR code to view the pdf catalog online.



Product Part No	Features & AccessoriesP	icture / Drawing	Guide for Selection and Ordering	LN-SBM-454028-LG	LN-SBMD-454028-LG
LN-SBM-454028-LG LN-SBM-456028-LG LN-SBM-606028-LG	Single Skin			✓	-
LN-SBMD-454028-LG LN-SBMD-456028-LG LN-SBMD-606028-LG	Double Skin			-	✓

Product Part No	Features & AccessoriesP	icture / Drawing	LN-SBM-456028-LG	LN-SBMD-456028-LG	LN-SBM-606028-LG	LN-SBMD-606028-LG
LN-SBM-454028-LG LN-SBM-456028-LG LN-SBM-606028-LG	Single Skin		✓	-	✓	-
LN-SBMD-454028-LG LN-SBMD-456028-LG LN-SBMD-606028-LG	Double Skin		-	✓	-	✓



19" SAFEBOX-B IP55

Indoor-Outdoor Cabinets



Please scan the QR code to view the pdf catalog online.



19" SAFEBOX-B IP55 Indoor/Outdoor Free Standing Cabinets		
Width (mm)	Height (U: 44,45 mm)	Depth (mm)
600	7U 9U 12U 16U 20U 22U 24U 26U	450/600



Load Carrying Capacity: 100 kgs.



19" Set & Stack



Wall Mounting Brackets



Please scan the QR code to view the pdf catalog online.



Load Carrying Capacity: 10 kgs.

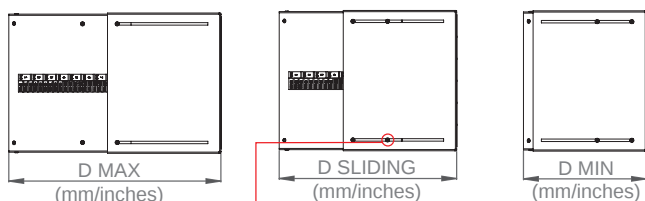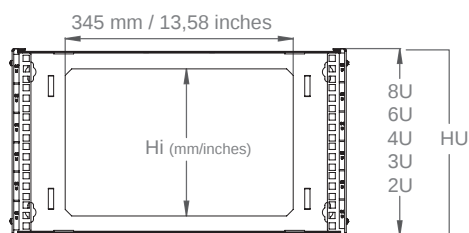

* To set D MAX one of the screw has to be taken off- which is stopping the sliding function at D SLIDING depth.

H U	H (mm/inches)	Hi (mm/inches)	D Max (mm/inches)	D Sliding (mm/inches)	D Min (mm/inches)
8U	372 14,64	312 12,28	430 16,92	360 14,17	250 9,84
6U	284 11,18	223 8,77	430 16,92	360 14,17	250 9,84
4U	195 7,67	134 5,27	430 16,92	360 14,17	250 9,84
3U	150 5,90	90 3,54	430 16,92	360 14,17	250 9,84
2U	106 4,17	45 1,77	430 16,92	360 14,17	250 9,84

19" PANDORA SOHO PANDORA SLIM

Wall Mounting Cabinets



Please scan the QR code to view the pdf catalog online.

PANDORA SLIM



PANDORA SOHO



19" PANDORA SOHO Series Wall Mounting Cabinets

Width (mm)	Height (U: 44,45 mm)	Depth (mm)
540	4U 7U 9U 12U	400

19" PANDORA SLIM Series Wall Mounting Cabinets

Width (mm)	Height (U: 44,45 mm)	Depth (mm)
540	3U + 2U	457



Please scan the QR code to view the product video online.



Load Carrying Capacity: 60 kgs.



19" Wall Mount Open Frame



Please scan the QR code to view the pdf catalog online.



19" Wall Mount Open Frame		
Width (mm)	Height (U: 44,45 mm)	Depth (mm)
540	7U	300
	9U	
	12U	
	16U	
	21U	



 **Load Carrying Capacity: 30 kgs.**



19" DVRbox

Wall Mounting Cabinets



Please scan the QR code to view the pdf catalog online.



19" DVRbox Series Wall Mounting Cabinets		
Width (mm)	Height (mm)	Depth (mm)
580	550	160



Load Carrying Capacity: 50 kgs.



DVRboxE

Series Security Wall Mounting Enclosure



Please scan the QR code to view the pdf catalog online.



DVBboxE Series Big Type Security Wall Mounting Enclosure		
Width (mm)	Height (mm)	Depth (mm)
550	435	152

DVBboxE Series Small Type Security Wall Mounting Enclosure		
Width (mm)	Height (mm)	Depth (mm)
450	355	102



Load Carrying Capacity: 20 kgs.


19" Data Center Solutions Cabinets



Please scan the QR code to view the pdf catalog online.




19" Data Center Solutions Cabinets		
Width (mm)	Height (U: 44,45 mm)	Depth (mm)
600	42U	1000
800	45U	1100
	47U	1200

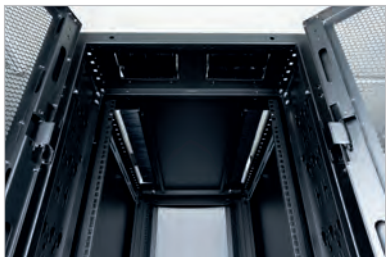

Please scan the QR code to view the product video online.



Load Carrying Capacity: 1500 kgs.

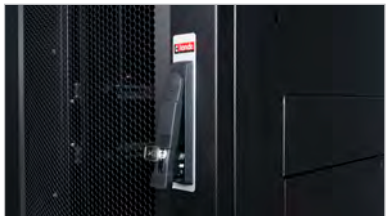

19" SmartQube IP55 Air-Conditioned Smart Cabinets



Please scan the QR code to view the pdf catalog online.



LN-SQ14-42U6010-XYLG-Z		
LN	Lande	LN
SQ	SmartQube	SQ
14	Cooling Capacity	6-8-10-14-20-28-34 kBtu Panel Type Air Conditioner / 3-5-7-9-13-17 kBtu Roof Type Air Conditioner
42U	Height of Cabinet	24U (1200 mm) - 33U (1600 mm) - 38U (1800 mm) 42U (2000 mm)
60	Width of Cabinet	60: 600 mm, 80: 800 mm Width
10	Depth of Cabinet	60: 600 mm, 80: 800 mm, 10: 1000 mm, 12: 1200 mm Depth
X	Front Door	M: Metal, G: Glass
Y	Plinth Height	1: Plinth 100 mm, 2: Plinth 200 mm
LG	Color of Cabinet	LG: Light Grey RAL 7035
Z	Low Noise	0: None, 1: Yes (Only for panel type cooling device)

 **Load Carrying Capacity: 1500 kgs.**



Micro Data Center Solutions



Please scan the QR code to view the pdf catalog online.



Load Carrying Capacity: 1500 kgs.

Micro DC - Micro Data Center				
Power per rack	kW	6 kW		10 kW
Redundancy UPS & Air Conditioner		N	N+1	2N
Quantity of racks	pcs	2-6		
Height - H	U	42U		45U
Width of rack (Server) - W	mm	600		
Width of rack (Network) - W	mm	800		
Width of rack (Energy) - W	mm	600		
System width - WS	mm	Variable depending of the system configuration		
Cabinets depth - D	mm	1050		
Cold aisle (front)		250 mm - Glass door		
Hot aisle (rear)		YOK - Perforated door	200 mm Glass door	200 mm Metal door
System depth - Ds	mm	1350		1550
Air conditioner power direct expansion DX	kW	10 kW	15 kW	30 kW
Dimensions	mm	42U & 45U x 300 x 1050		
Power input		3 phase, 400 Volt, 50/60 Hz		
UPS	kVA	10 kVA	20 kVA	30 kVA
UPS - batteries		Variable backup time depending of the system configuration		
UPS input		3 phase, 400 Volt, 50/60 Hz		
PDU		Basic	Monitored	Managed
		-	Inlet or each outlet	Each outlet
PDU - input		1 phase, 240 Volt, 50/60 Hz, 32 amp, 3x6 mm H05VV-F		
PDU - outputs		20xC13+4xC19	20xC13+4xC19 36xC13+6xC19	20xC13+4xC19

Smart DC - Micro Data Center				
Power per rack	kW	6 kW		10 kW
Redundancy UPS & Air Conditioner		N		2N
Number of racks	pcs	1		
Height - H	U	42U		45U
Width of rack - W	mm	600		800
Width of the system WS mm	mm	900		1100
Cabinet depth - D	mm	1050		
Cold aisle (front)		250 mm - Glass door		
Hot aisle (rear)		None - Perforated door	200 mm Glass door	200 mm Metal door
System depth - Ds	mm	1350		1550
Air conditioner power direct expansion DX	kW	10 kW		15 kW
Dimensions	mm	42U & 45U x 300 x 1050		
Power input		3 Faz, 400 Volt, 50/60 Hz		
UPS	kVA	6 kVA (2U)		10 kVA (3U)
UPS - batteries (5-15 minutes)	adet	16 pcs 9 Ah (2U)		20 pcs 9 Ah (3U)
UPS input		1 Faz, 240 Volt, 50/60 Hz		
PDU		Basic	Monitored	Managed
		-	Inlet or each outlet	Each outlet
PDU - Inlet		1 Phase, 240 Volt, 50/60 Hz, 32 Amp, 3x6 mm H05VV-F		
PDU - outlet		20xC13+4xC19	20xC13+4xC19 36xC13+6xC19	20xC13+4xC19

POLAR

19" IT-RACK



Please scan the QR code to view the pdf catalog online.



YOUR SPECIALIST IT REFRIGERATOR RACK

Features:

- Stand alone unit for your IT technologies.
- Plug & Play.
- IP55 Rated Rack
- Hot (Rear) / Cold (front) corridor structure.
- Two individual compartments for cooling and rack storage. For security each compartment has different keys. Bottom compartment is for cooling technology, where upper compartment is for IT. With different key options for security AC technicians have no access to IT section and IT technicians have no access to AC compartment.
- Strong and Sturdy. Maximum loading capacity: 1500 kgs.
- Schneider Electric ACRMD4KI... Rack Mount 5U cooling unit inside. 3,5KW / 7,0KW 10U offers alternatively with 2 pcs of ACRMD4KI with single plenum. Once second AC installed, no detachment or removal of the first one. Additional rear panel will be supplied loose with valves to connect second AC unit with second external condenser.
- Thermal insulation cover with aluminium foil on cold corridor section.
- Heavy duty specific castors with levelling feet installed. Each Castor has 400kg load rating while castors rolling.
- EMS Rack Mount Environmental Monitoring and Management System is readily installed, which allows remote monitor and control of the environmental situation of your IT refrigerator Rack.
- Sensors - Smoke, temperature, leakage, door detection sensors.
- Temperature monitored, Emergency Ventilation Fan System triggered by high temperature inside cabinet. Air blocker under the canopy to avoid shortcut of hot and cold air sections.
- Front Safety glass door is double layer glass to avoid condensation or damp on the glass of cold section.
- Lockable and removable side panels with handles on both compartments.
- Brushed Cable and Power Cord entry at rear side of AC section.
- Quick fix- easy installation copper pipe connection valves on the rear Blanking Panel. Second being supplied loose if second AC is requested.
- 6U ABS toolless blanking panels (snap breakable into 1U, 2U, 3U, 4U, 5U) installed all height in front side/cold section.
- Vertical 0 (zero U) or rack mount 1-2U multiple version of PDU from basic to managed can be selected and ordered as an accessory.
- Air Conditioning User Display (LCD) can be moved to any height inside cabinet IT section.




POLAR

19" IT-RACK



Please scan the QR code to view the pdf catalog online.

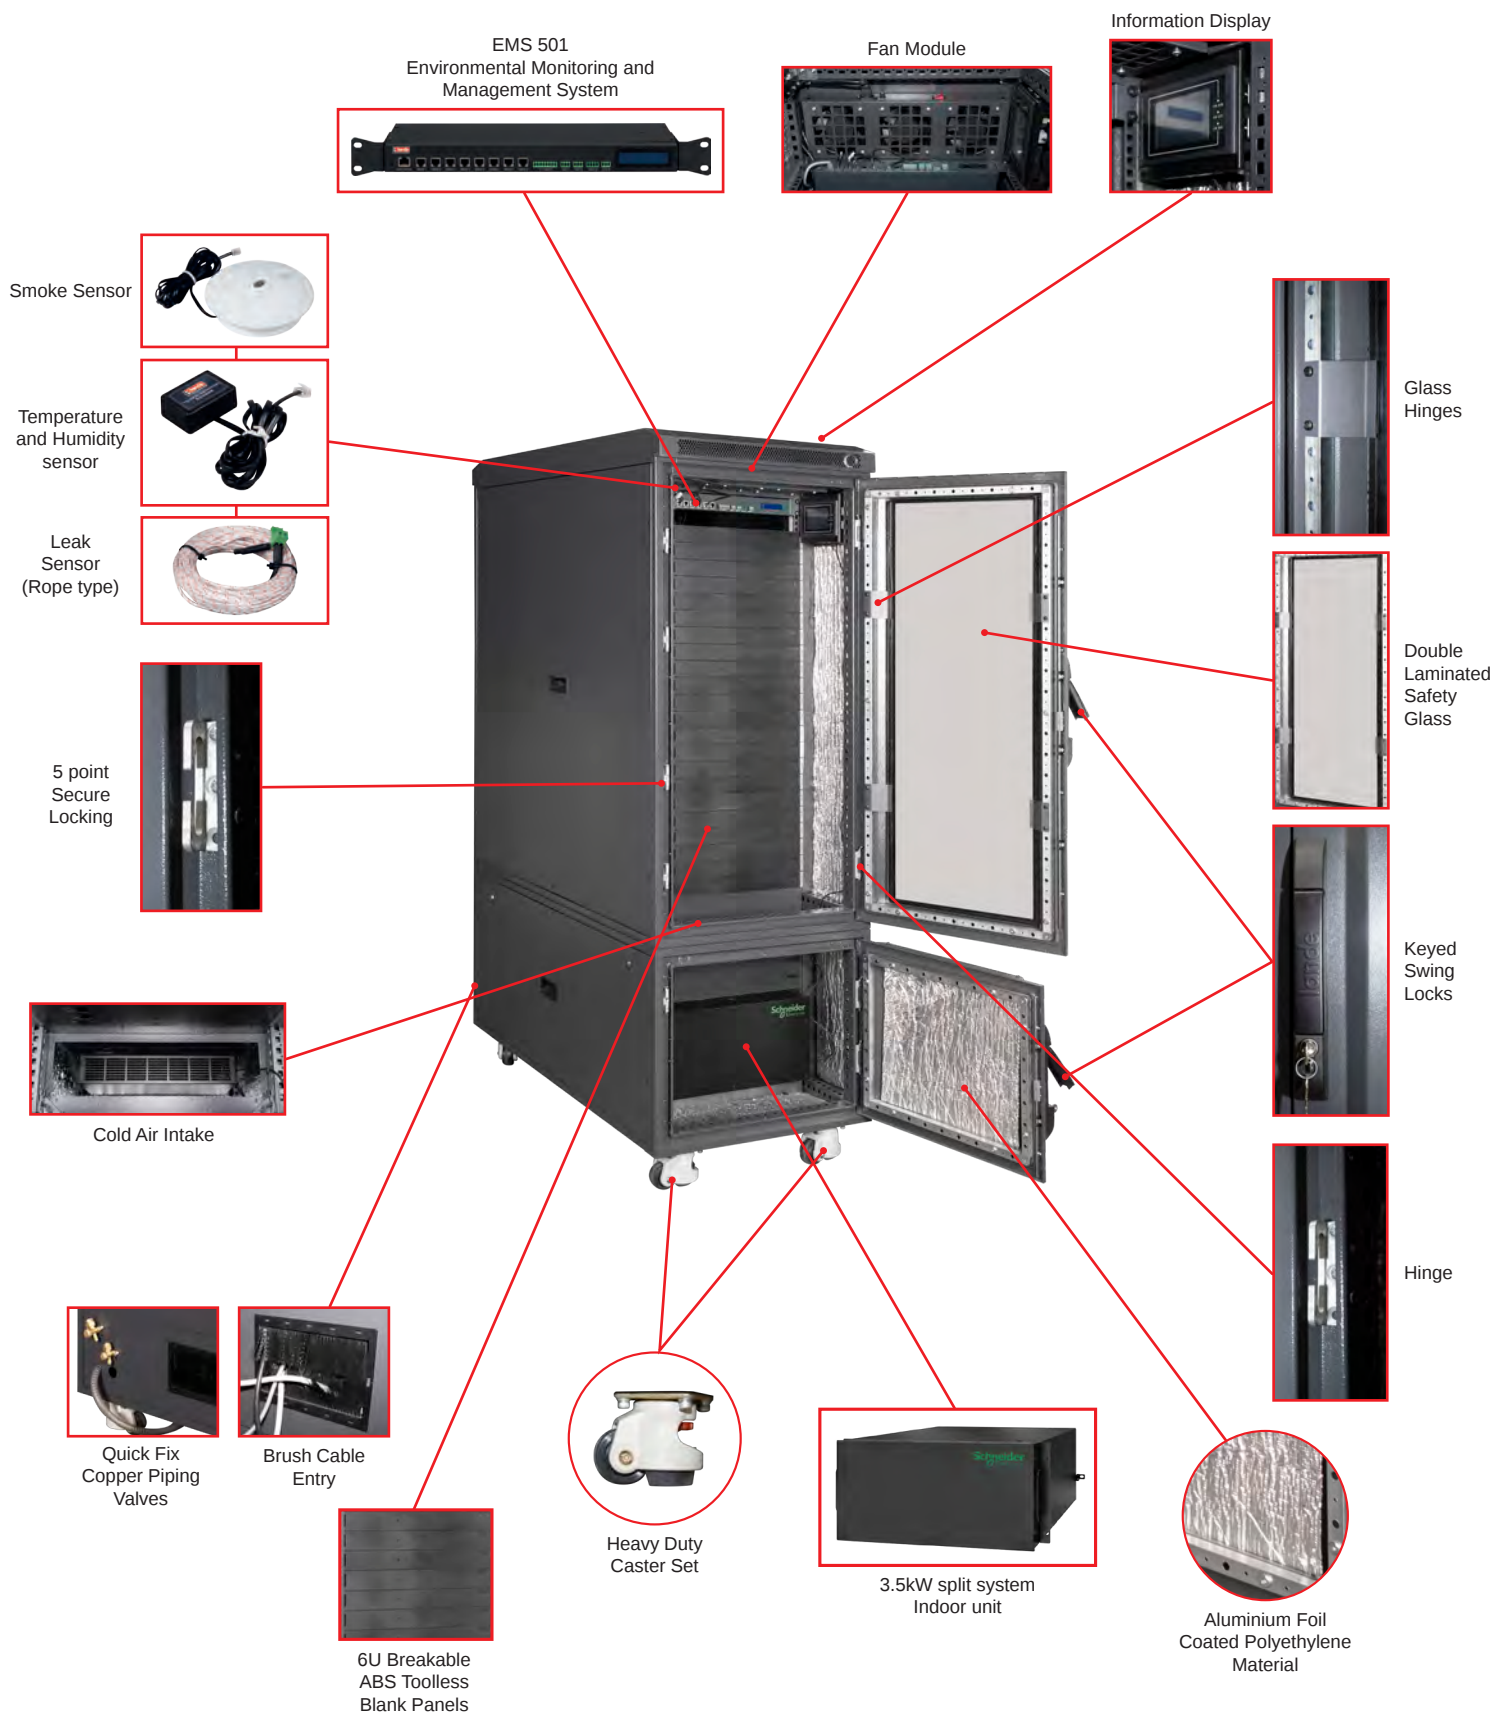


MobileQube

All in One Container Data Center



Please scan the QR code to view the pdf catalog online.

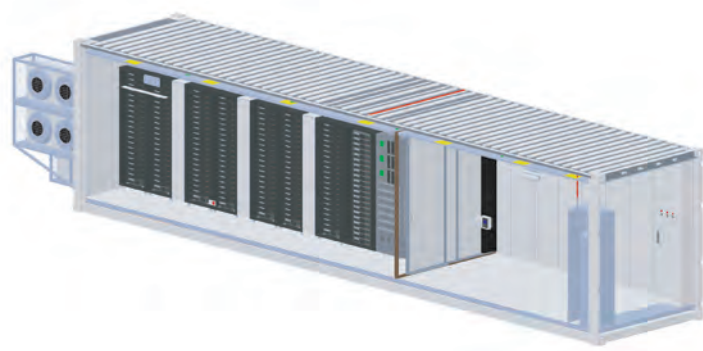

Who Needs?

All Size Companies and Industrial Facilities-Factories
Hospitals, Universities, Government Organisations,
Ministries, Airports, Military Bases, Border Control and
Large Security Infrastructures
Live Broadcasting and TV Channel Operations,
GSM Operations, Large Construction Sites
Public Facilities and Municipalities

+

As a Disaster Data Center

Benefits

- ✓ Unique All-in-One Solution
- ✓ Centralized and Intelligent Management and Monitoring
- ✓ Easy Manage, Maintenance and Repair
- ✓ High Power Density and Cooling Products
- ✓ Reliable Integrated Solution
- ✓ Pre-Fabricated Fastly and Easy Installation
- ✓ Low Power Consumption
- ✓ Easy and Fast Transport
- ✓ Easy Changing Location



MOBESeline Series IP66 Outdoor Cabinets



Please scan the QR code to view the pdf catalog online.



► **Extreme Resistance to Mechanical Impacts, Electromagnetic Interferences, Sun Radiation, Extreme Hot and Cold, Rain, Snow, Wind, Terrorist Attack and Sabotage Are Maintained By Lande Security Cabinets and Field Enclosures!**



IP66 Industrial Wall Mounting Enclosures



Please scan the QR code to view the pdf catalog online.



- Metallic welded monoblock body for extra strength.
- Bended side edges for better contact with door sealing.
- Narrow side bendings provide large usage area for internal mounting.
- Mounting plate can be pass through easily in or out of box.
- IP66 Protection level against dust & water ingress as per IEC EN60529
- IK10 Mechanical impact resistance as per IEC EN62262.
- Metal cabinets painted 70-90µ thickness RAL 7035 fine wrinkle with
- Nanotechnology to obtain upto 500 hours of salt spray test resistance.
- High chemical resistance.
- Multibended door structure to gain extra strength.
- Reversible doors with single/double lock. Zamak Hinges and edges have high-performance anti-corrosion treatment.
- Poly-urethane seal on door.
- EMKA branded high quality locks
- Vertical Mounting angles with holes on each 25 mm on door.
- Bottom cable entry.Sealed cable access panel at bottom



Load Carrying Capacity: 150 kgs.

IP66 Industrial Wall Mounting Enclosures		
Width (mm)	Height (mm)	Depth (mm)
200	300	150
300	400	
400	500	
500	600	
600	700	
800	800	
	1000	
	1200	



19" IP55 Free Standing Industrial Enclosures



Please scan the QR code to view the pdf catalog online.



- Closed section profile has high moment of inertia on X & Y axis to gain extra strength.
- Profiles produced with DIN EN10142-2000 DX51 D+Z material and has high resistance against corrosion.
- Single-type profile section for all width-depth- height directions.
- New Aluminium structure corners provides easy assembly to establish enclosure frame in minutes
- Aluminium corner part produced from E-160 material with Aluminium injection moulding method which creates ultra resistance against corrosion.
- Cross rails have easy to fix system. (Single screw & snap-in)
- Electro-assembled Mounting plate can be slid on strong profiles to easy assembly.
- IP55 Protection level against dust & water ingress as per IEC EN 60529
- IK10 Mechanical impact resistance as per IEC EN62262.
- Metal enclosures painted 70-90µ thickness RAL 7035 fine wrinkle with Nanotechnology to obtain upto 500 hours of salt spray test resistance.
- Reversible door structure with up to 4 pcs of Zamak Hinges and 4-points locking system.
- Poly-urethane seal on door.
- EMKA branded high quality locks
- Flatpackage option is available for less transportation costs.



Load Carrying Capacity: 1500 kgs.

19" IP55 Free Standing Industrial Enclosures		
Width (mm)	Height (U: 44,45 mm)	Depth (mm)
600	24U	600
800	33U	800
	38U	1000
	42U	

Metal Furniture Series

Ziglat Series



Please scan the QR code to view the pdf catalog online.



Computer Workstations (IP20-IP55)











Please scan the QR code to view the pdf catalog online.



Accessories



Please scan the QR code to view the pdf web site online.

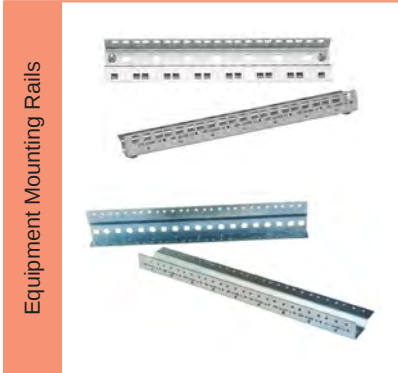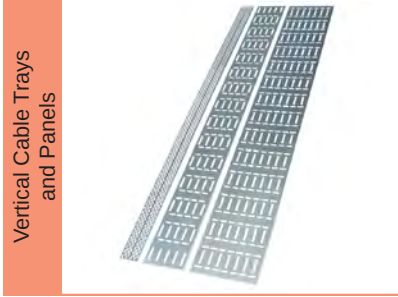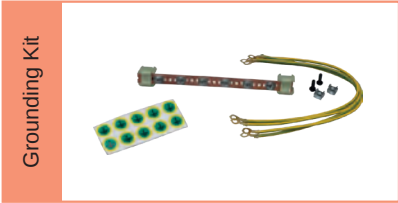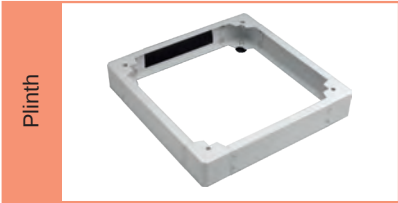

PDU's (Power Distribution Units)

Accessories



Please scan the QR code to view the pdf catalog online.

Vertical & Horizontal PDU's

- Monitored
- Managed
- Ammeter Display Unit
- Voltage Protection



- RF Filter
- Basic
- Schuko Type
- UK Type
- C19 / C13

KVM Consoles



Please scan the QR code to view the pdf catalog online.



- 17" LCD KVM Console (Keyboard + Touch Pad Mouse)
- 17" LCD KVM Switch, 8 port, combo support (USB/PS.2) combo cable
- 17" LCD KVM Switch, 16 port, combo support (USB/PS.2) combo cable



Cabinet Control & Management Unit




Please scan the QR code to view the pdf catalog online.


Environmental Management System is a set of processes and practices that enable an organization to monitor the external environmental factors, reduce the undesired environmental impacts and increase operating efficiency.



Advantages

- Enhanced environmental monitoring
- Remote monitoring of multiple sites
- Improved and controllable compatibility
- High security and internal audit capacity
- Enhanced efficiency resulting in reduced costs
- Reduced human resources dependency
- Systematic data analysis
- Corrective and preventive actions
- Instant and retrospective reporting
- Raised awareness on environmental impacts

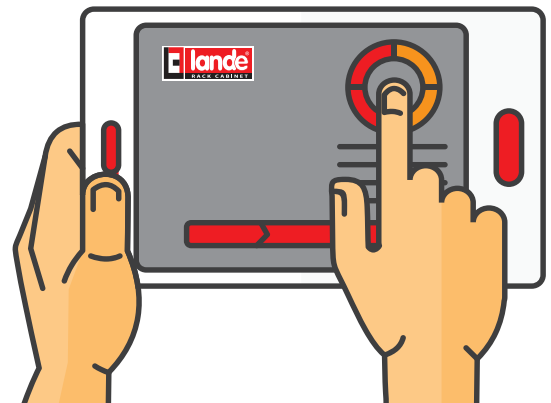

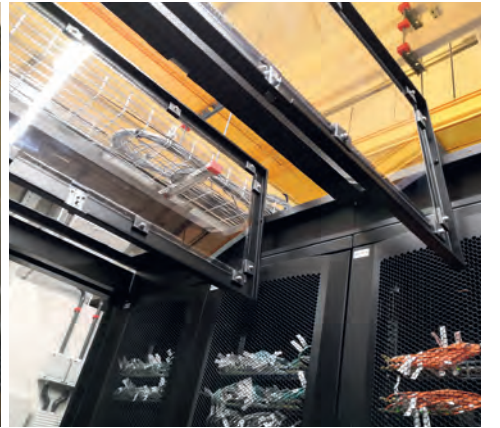

You may never know where you
will come across a Lande Cabinet!



Barouk - Lebanon



Batumi - Georgia



Buzurgan Oil Field - Messan Iraq



Heredia - Costa Rica



Doha Port - Qatar



Dukhan Highway Central Ashghal - Qatar



Northern Marmara Highway - Türkiye



Lusail Iconic Stadium - Qatar



Sir Anthony Mamo Oncology Centre
Malta



Powering Abu Samra Qatar Saudi Border



Shard London - England



Powering Abu Samra Qatar Saudi Border



FULL COMPLIANCE



Load
Capacity Test
600 kg -1500 kg



IP54
IP66




Facility Security
Clearance Certificate
(FSCC) NATO



Acoustic Noise
Insulation Test
ISO EN 11546



ZONE 4 Seismic Test



IEC 60068-3-3
Seismic Test



CONTACT DETAILS

Headquarters

Address:

Merve Mah. Gazi Cad. No: 17
Sancaktepe - İstanbul / TÜRKİYE

Phone: +90 216 312 26 53 pbx

Fax : +90 216 312 09 09

Factory

Address:

20. Cadde No: 14 Eskişehir
Organize San. Böl. 26110
Eskişehir / TÜRKİYE

Phone: +90 222 236 24 66

Fax : +90 222 236 13 53

