



19" and 10" NETbox SOHO Network Wall Mounting Cabinets

Flat Pack Design, Super Economy in Logistics



	7U, 9U, 12U Heights D300/400 mm Printed Box		7U, 9U, 12U Heights D500/600 mm Neutral White Box			7U, 9U, 12U Heights D300/400 mm Printed Box	7U, 9U, 12U Heights D500/600 mm Neutral White Box
		50 pcs				50 pcs	50 pcs
						50 pcs	
						50 pcs	50 pcs
						100 pcs	100 pcs

19" and 10" NETbox SOHO Network Wall Mounting Cabinets

Family

NETbox SOHO Network Series wall mounting cabinets are designed for Network distribution, where a quick installation needed at an efficient cost. While product gives maximum performance on cabling and networking infrastructure, in parallel provides a very respective economy compared to its quality which is based on high technologic fully automated industry.

Product range has been optimized with the needed performance and quality as well provides the best cost scheme.


The 19" NETbox SOHO Network product range designed for the most slim packing for the flat pack delivery purposes. Cost of delivery is minimal, and warehousing costs are relatively less with the intelligent design and slim packing

Each cabinet is supplied as standard with a glass front door lockable with a barrel style locking unit.

The 19" W540xD300 mm only 7U height and W540xD400 mm, W540xD500 mm and W540xD600 mm available sizes for 3 available heights of 7U, 9U, 12U.

Completely standard and stocked product portfolio, being delivered a single piece flat pack product, as shipping configuration the one set: 2 pieces 19" adjustable equipment mounting rails included.

And 10" 312x300 mm available at 6U and 9U height completely standard and stocked product portfolio, being delivered a single piece assembled product, as shipping configuration the one set: 2 pieces 10" adjustable equipment mounting rails included.

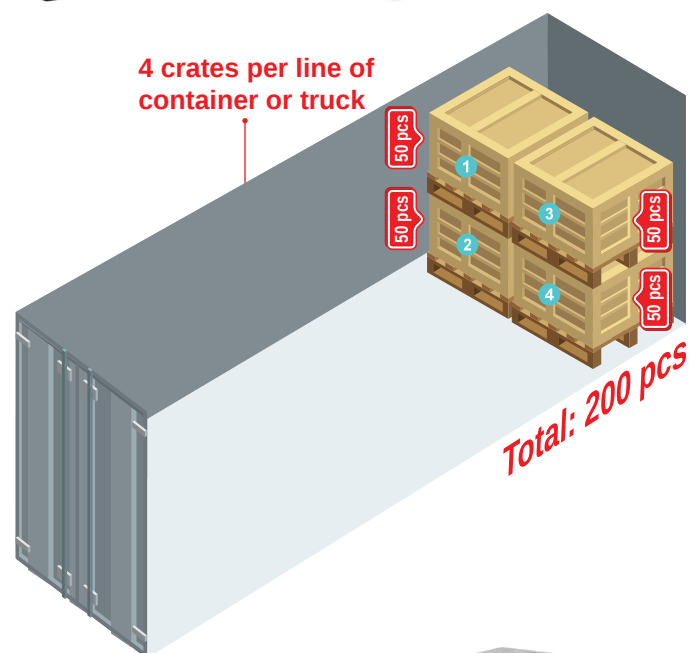

19" and 10" NETbox SOHO Network Wall Mounting Cabinets

Family

Construction Details

Framework- Top/Bottom Cases:

Multi folded automated bending technology applied framework and top/bottom cases, provides a heavy duty structure results to high load capacity of: up to 80 kg on wall nominal way.

Monoblock multi folded top and bottom cases resulted to a very heavy construction, tightly fixed to the framework with fixing hardware, fully modular system generated. Top case has a punched/vented forced ventilation (fan module) integration housing on 19" versions.

A ready fan module can be integrated or just single fan could be assembled directly. In case less heat load occurs inside the cabinet than vented top case discharges the hot air via convection.

Top case integrated with a brushed cable entry point with w:145 x d:70 mm size allows proper cabling insertion as well preventing the dust entry.

Bottom case integrated with a PVC Gland plate w:145 x d:70 mm.

In case of cables to be inserted from bottom case, the brushed cable entry and PVC gland plate could be replacing each other.

The full length smoked, shatterproof, antistatic, 4,0 mm thickness glass with single point locking barrel lock is standard shipping configuration.

Solid metal door is available upon request, please see front door variations at page 8, 11.

Glass front door opening direction is set right to left, but reversible to left to right at site with removing the hinge system. Hinge system is channel type with screws. Solid metal and Perforated metal doors, Side metal framed glass front door opening direction is also set right to left but reversible to left to right with spring hinge system.

NETbox SOHO Network Wall cabinets has optionally sticky colour changing thermometer, range 20°C to 40°C as an accessory.



19" NETbox SOHO Network Wall Mounting Cabinets

Width: 540 mm
Depth: 300 mm
400 mm
500 mm
600 mm

Load Capacity: 80 kgs.

1 Available U Height: 07U for D: 300 mm
3 Different U Heights: 07U, 09U, 12U
for D: 400/500/600 mm

Standards and Compliances:



ISO 9001
Quality Management System

EN 61587-1
 Mechanical Structures for
 Electronic Equipment

EN IEC 60297, 19" Mounting
 EN IEC 60917 Overall Cabinet
 Dimensions

EN/IEC 60529 - IP20 Ingress Protection
 performance

EN/IEC 62262 - IK07 Mechanical
 Impact Resistance

EIA/ ECA-310 (D/E) 19" 482,6 mm
 and U 44,45 mm Height Sizing



CE conform to
 EN 60950-1
 Information Technology
 Equipment, Safety,
 Part-1: General Requirement

EN IEC 62368-1 Audio/Video, Information
 and Communication Technology Equipment
 Part 1: Safety requirements



UL listed to
 UL 2416, Outline of Investigation for
 Audio/Video, Information and
 Communication Technology Equipment
 Cabinet, Enclosure and Rack
 Systems; UL 60950-1 and CSA C22.2
 NO. 60950-1-07, Information Technology
 Equipment Safety
 Part 1: General Requirements



Environment Friendly;
 ISO 14001 Environmental
 Management System
 RoHS compliancy
 %100 Recyclable Material

Standard Colors:



RAL 7035 Light Grey



RAL 9005 Black



7U, 9U, 12U Heights
D300/400 mm
Printed Box



7U, 9U, 12U Heights
D500/600 mm
Neutral White Box



NETbox SOHO Series Wall Mounting Networking Enclosures, with 19" w:540 mm and d:300/400/500/600 mm physical sizes, with less depth need in very efficient cost scheme and logistics, and 3 different height for D:400/500/600 mm, gives a choice of selection chart for users. D:300 mm is available at 7U Height where just simple Networking distribution to be operated.


All Lande 19" NETbox SOHO Wall cabinets are being delivered as a single piece flat pack enclosure, with standard factory settings.

For door and panel variations, please see door options in page 8.


19" NETbox SOHO Network Wall Mounting Cabinets

Construction Drawing


Width: 540 mm
Depth: 300 mm
400 mm
500 mm
600 mm

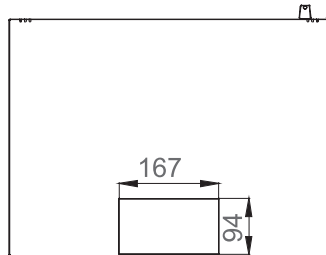


Bottom view

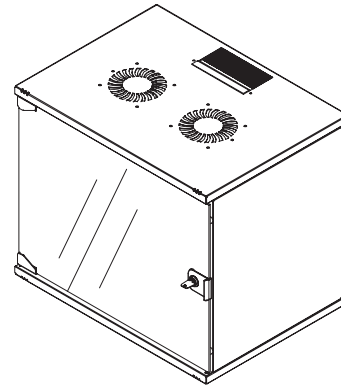


Isometric view

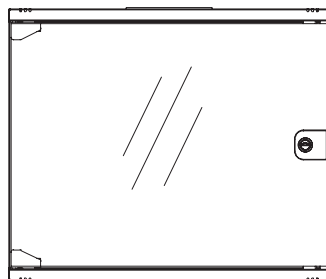


Front view




Side view

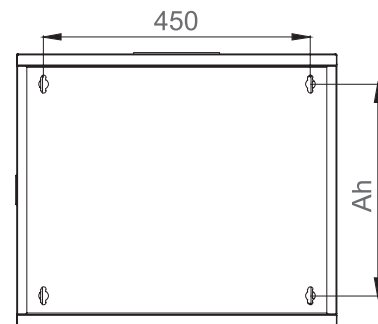

Rear view



Top view

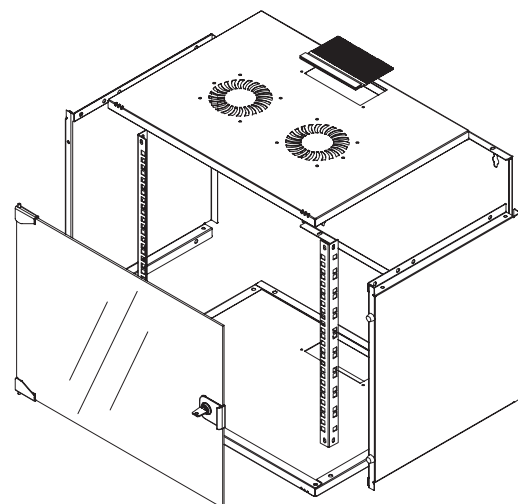


Exploded view

19" NETbox SOHO Network Wall Mounting Cabinets

Width: 540 mm
Depth: 300 mm
400 mm

Construction Drawing

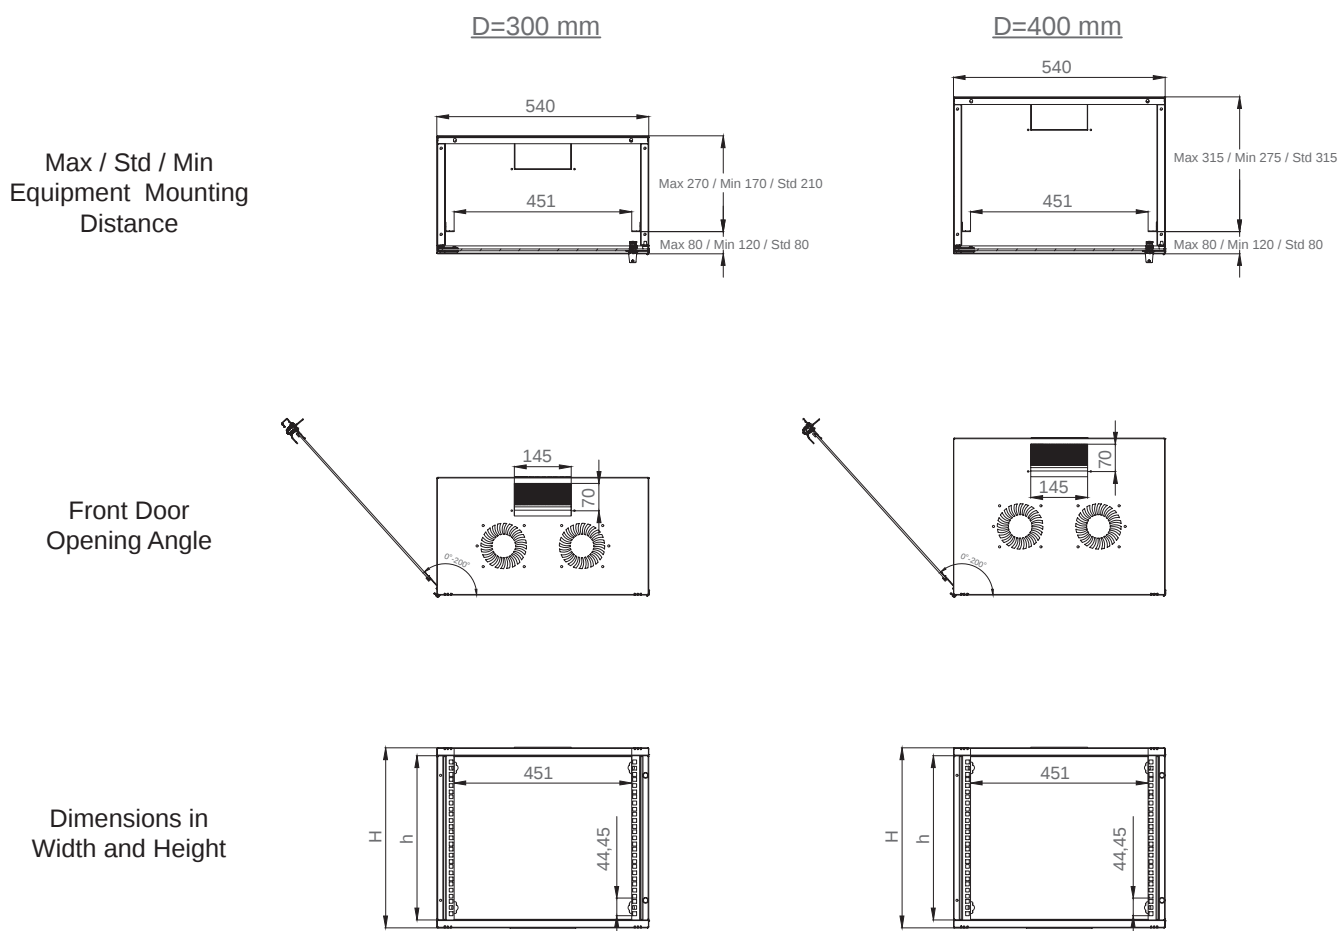

19" NETbox SOHO Series Wall Mounting Cabinets W=540 mm D=300/400 mm

*** Product Number	Product Description	Size WxDxH mm	h Size in U	h in mm	H mm, overall without feet and/or castor	Ah Wall Mounting h mm	Width Overall mm	Width Rail to Rear Door	Depth Overall mm	*Depth Shipping Conf. Rail to Rear Panel mm	QTY IN PACKAGE	PACKING DIMENSIONS WxDxH mm	Standard NET Weight of Product kgs	Gross Weight of Product kgs	QTY IN PALLET	PALLET DIMENSIONS WxDxH mm	Pallet Weight kgs
LN-SH07U5430-CC-F0-X	7U 19" Wall Mounting Cabinet W=540 mm D=300 mm	540x300x370	7U	311	370	268	540	19"	300	210	1	630x425x70	7,8	9,3	50	1165X1450X880	510
LN-SH07U5440-CC-F0-X	7U 19" Wall Mounting Cabinet W=540 mm D=400 mm	540x400x370	7U	311	370	268	540	19"	400	310	1	630x425x70	9,5	10,7	50	1165X1450X880	580
LN-SH09U5440-CC-F0-X	9U 19" Wall Mounting Cabinet W=540 mm D=400 mm	540x400x459	9U	400	459	357	540	19"	400	310	1	630x445x70	10,8	12,1	50	1165X1450X880	656
LN-SH12U5440-CC-F0-X	12U 19" Wall Mounting Cabinet W=540 mm D=400 mm	540x400x592	12U	533	592	490	540	19"	400	310	1	650x580x90	13,5	14,9	50	1300x1300x1290	745

* See min and max adjustable depth variations on drawings.

**CC= Color Code, LG Light Grey RAL 7035, BL Black RAL 9005 for customers to define while ordering.

** X front door selection: customers to define while ordering, "X=0,1,2,3" configuration is defining front door structure, please see front door selection on drawings at page 8.


*** F= F0 notation means the delivery is in unmounted "Flat Pack" configuration standard stock is in flat pack form. If the delivery needed in assembled pack please add A0 notation.

Sample Part Number: SH07U5440-CC-A0-X

19" NETbox SOHO Network Wall Mounting Cabinets

Width: 540 mm
Depth: 500 mm
600 mm

Construction Drawing

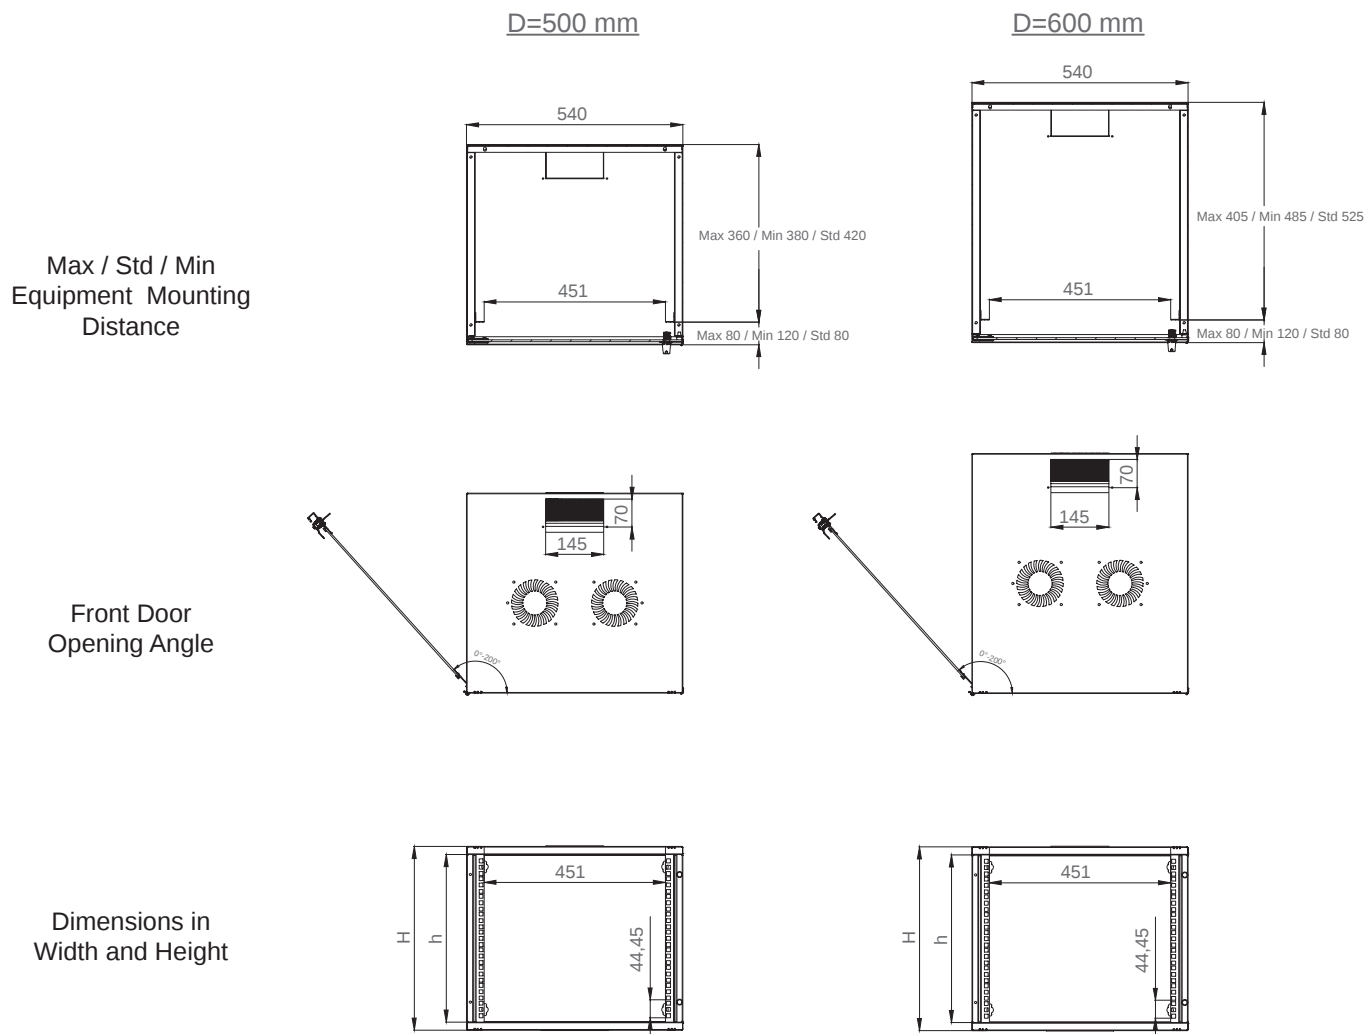

19" NETbox SOHO Series Wall Mounting Cabinets W=540 mm D=500/600 mm

*** Product Number	Product Description	Size WxDxH mm	h Size in U	h in mm	H mm, overall without feet and/or castor	Ah Wall Mounting h mm	Width Overall mm	Width Rail to Rear Door	Depth Overall mm	*Depth Shipping Conf. Rail to Rear Panel mm	QTY IN PACKAGE	PACKING DIMENSIONS WxDxH mm	Standard NET Weight of Product kgs	Gross Weight of Product kgs	QTY IN PALLET	PALLET DIMENSIONS WxDxH mm	Pallet Weight kgs
LN-SH07U5450-CC-F0-X	7U 19" Wall Mounting Cabinet W=540 mm D=500 mm	540x500x370	7U	311	370	268	540	19"	500	310	1	665x600x90	10,6	12,1	50	1300x1300x1230	621,5
LN-SH09U5450-CC-F0-X	9U 19" Wall Mounting Cabinet W=540 mm D=500 mm	540x500x459	9U	400	459	357	540	19"	500	310	1	665x600x90	12,2	13,7	50	1300x1300x1230	702,5
LN-SH12U5450-CC-F0-X	12U 19" Wall Mounting Cabinet W=540 mm D=500 mm	540x500x592	12U	533	592	490	540	19"	500	310	1	665x600x90	14,7	16,2	50	1300x1300x1230	825
LN-SH07U5460-CC-F0-X	7U 19" Wall Mounting Cabinet W=540 mm D=600 mm	540x600x370	7U	311	370	268	540	19"	600	310	1	665x635x90	12,2	13,7	50	1300x1300x1230	705,5
LN-SH09U5460-CC-F0-X	9U 19" Wall Mounting Cabinet W=540 mm D=600 mm	540x600x459	9U	400	459	357	540	19"	600	310	1	665x635x90	14	15,5	50	1300x1300x1230	793
LN-SH12U5460-CC-F0-X	12U 19" Wall Mounting Cabinet W=540 mm D=600 mm	540x600x592	12U	533	592	490	540	19"	600	310	1	665x635x90	16,4	17,9	50	1300x1300x1230	915,5

* See min and max adjustable depth variations on drawings.

**CC= Color Code, LG Light Grey RAL 7035, BL Black RAL 9005 for customers to define while ordering.

** X front door selection: customers to define while ordering, "X=0,1,2,3" configuration is defining front door structure, please see front door selection on drawings at page 8.


*** F= F0 notation means the delivery is in unmounted "Flat Pack" configuration standard stock is in flat pack form. If the delivery needed in assembled pack please add A0 notation.

Sample Part Number: SH07U5450-CC-A0-X

19" NETbox SOHO Network Wall Mounting Cabinets

Door Options

Width: 540 mm
Depth: 300 mm
400 mm
500 mm
600 mm

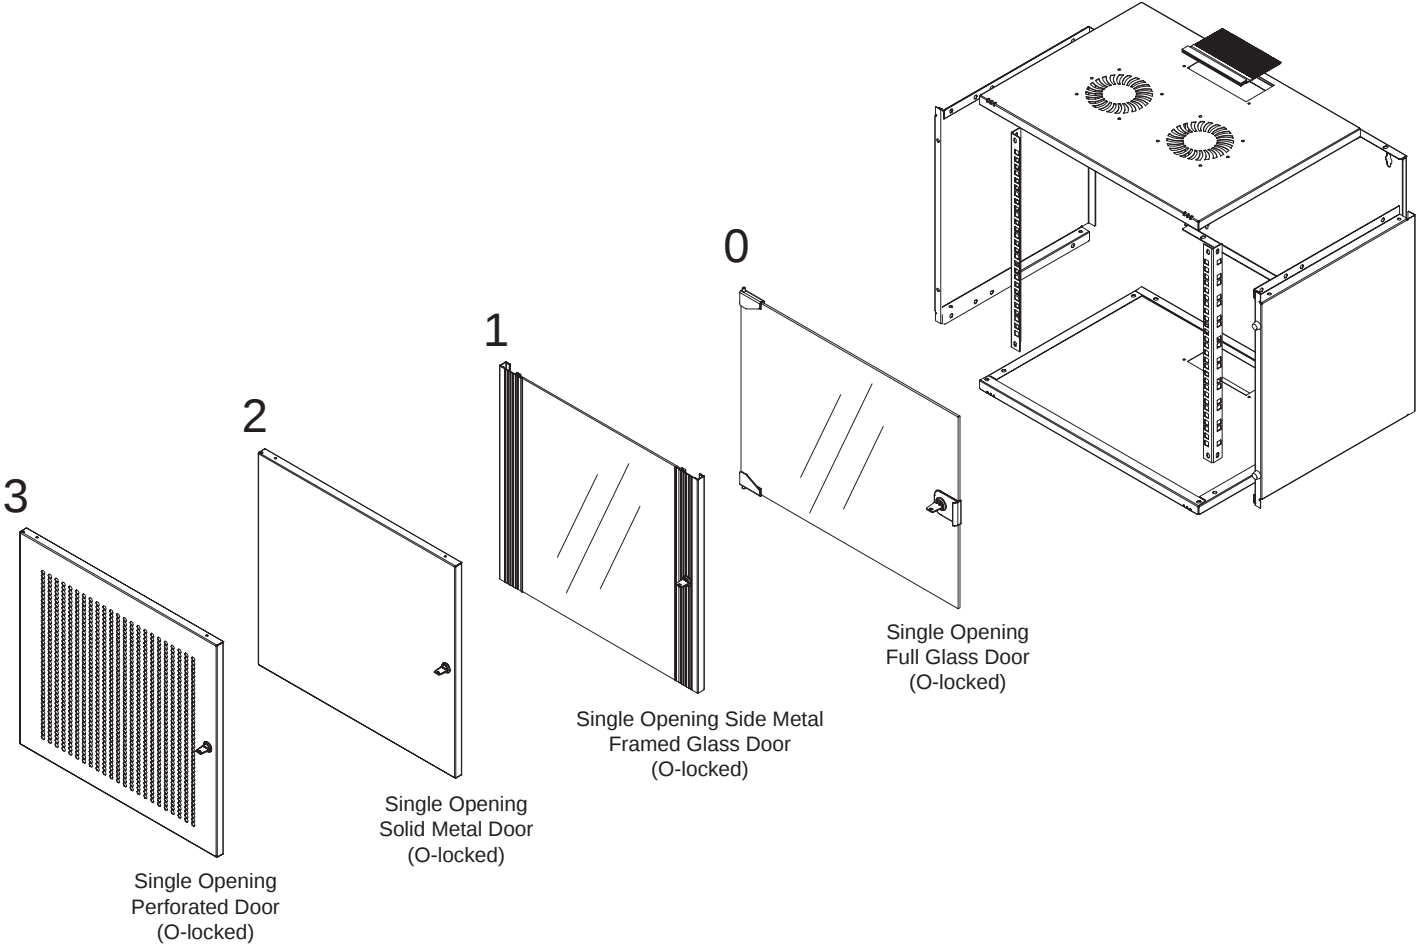

LN-AA - XXU - WW - DD - CC	F0/A0 0,1,2,3
LN: Corporate codification beginning letters mentioning Lande in Short Format as LN AA: Family group of enclosure; SH for small office home office range XX: Numeric character defining the height of enclosures, depending on model differences between 07 to 12 to be selected from price list, website or catalogue U: U height alphanumeric notation, concrete (non editable- fixed character) WW: The first 2 digits of the width info, 54 for W=540 mm cabinets DD: The first 2 digits of the depth info, 30 for D=300 mm, 40 for D=400 mm, 50 for D= 500 mm, 60 for D= 600 mm cabinets. CC: Color code, LG for Light Grey RAL 7035, BL for Black RAL 9005	F0: Flat Pack A0: Assembled Packing 0: Full Glass Front Door 1: Side Metal Framed Glass Front Door 2: Solid Metal Front Door 3: Perforated Metal Front Door

10" NETbox SOHO Network Wall Mounting Cabinets

Width: 312 mm
Depth: 300 mm

Construction Details

Framework- Top/Bottom Cases:

Multi Folded Automated Bending technology applied framework and top/bottom cases, provides a heavy duty structure results to high load capacity of: 20 kgs on wall nominal load.

Monoblock multi folded top and bottom cases resulted to a very heavy construction, tightly fixed to the framework with fixing hardware, fully modular system generated.

Top case integrated with a brushed cable entry point with w:145 mm x d:70 mm size allows proper cabling insertion as well preventing the dust entry.

Bottom case integrated with a PVC Gland plate w:145 mm x d:70 mm.

In case of cables to be inserted from bottom case, the brushed cable entry and PVC gland plate could be replacing each other.

The full length smoked, shatterproof, antistatic, 4,0 mm thickness glass with single point locking barrel lock is standard shipping configuration.

Front door opening direction is set right to left, but reversible to left to right at site with removing the hinge system. Hinge system is channel type with screws.

NETbox SOHO Network Wall cabinets has as an accessory sticky colour changing thermometer, range 20°C to 40°C as an accessory.


Available / Stocked NETbox SOHO Network Wall cabinets are in RAL 7035 Light Grey and Black RAL 9005 colors.



10" NETbox SOHO Network Wall Mounting Cabinets

Width: 312 mm
Depth: 300 mm

Construction Drawing

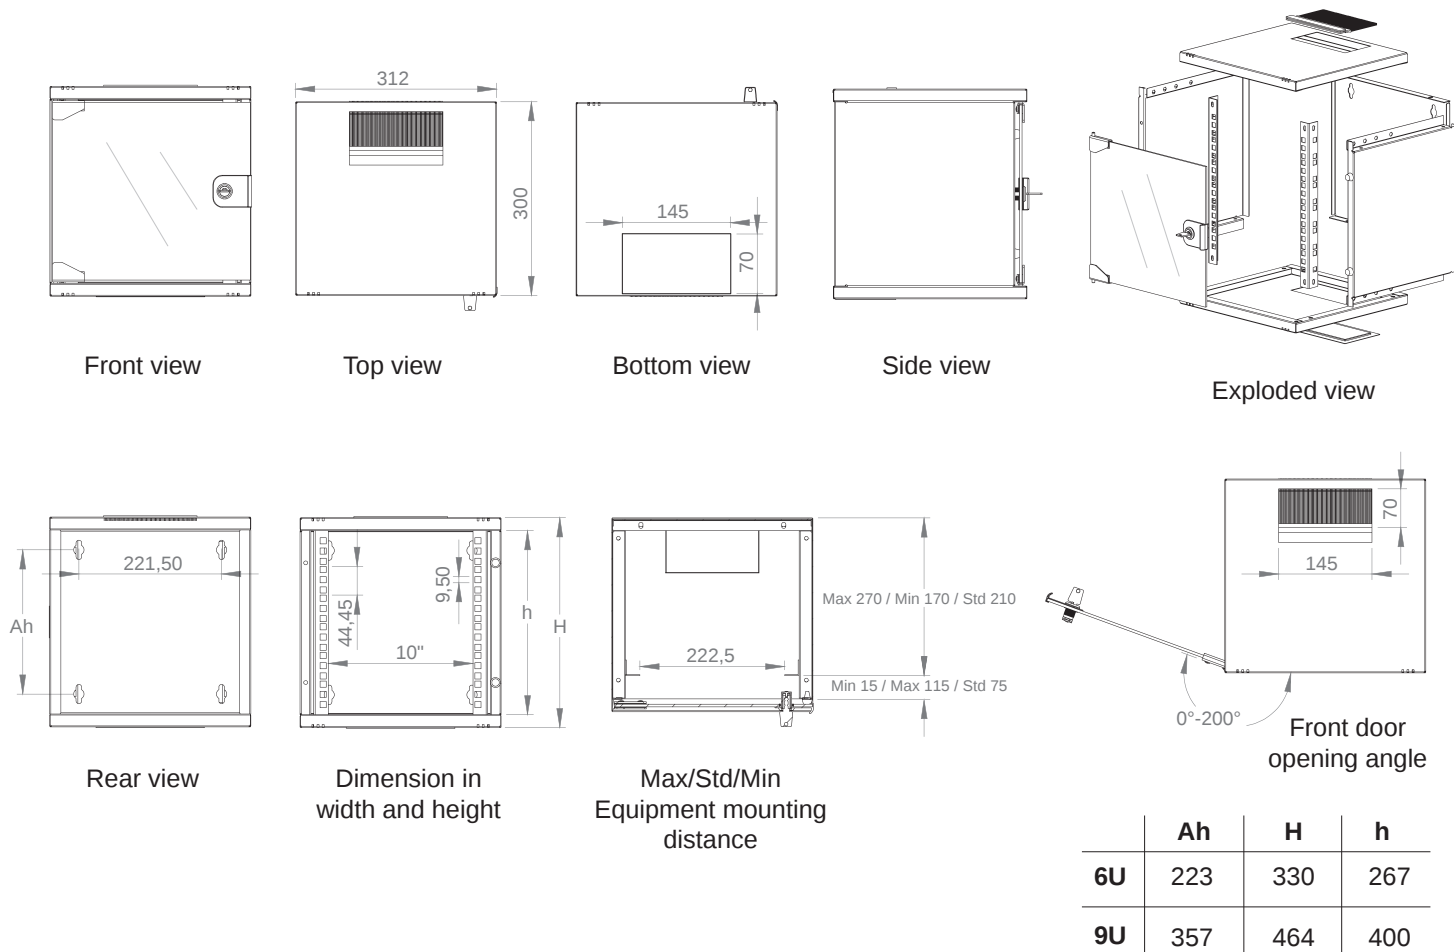

10" NETbox SOHO Series Wall Mounting Cabinets W= 312 mm D= 300 mm

**Product Number	Product Description	Size WxDxH mm	h Size in U	h in mm	H mm, overall	Ah Wall Mounting h mm	Width Overall mm	Width Rail to Rear Door	Depth Overall mm	*Depth Shipping Conf. Rail to Rear Panel mm	QTY IN PACKAGE	PACKING DIMENSIONS WxDxH mm	Standard NET Weight of Product kgs	Gross Weight of Product kgs	QTY IN PALLET	PALLET DIMENSIONS WxDxH mm	Pallet Weight kgs
LN-SH06U3030-CC-X	6U 10" Wall Mounting Cabinet W=300 mm D=300 mm	312x300x326	6U	267	326	223	312	10"	300	210	1	360x345x410	5,42	6,07	57	1100x1150x2610	360
LN-SH09U3030-CC-X	9U 10" Wall Mounting Cabinet W=300 mm D=300 mm	312x300x459	9U	400	459	357	312	10"	300	210	1	360x345x545	6,77	7,56	36	1100x1150x2330	305

* See min and max adjustable depth variations on drawings.


** CC= LG for Light Grey RAL 7035 & BL for Black RAL 9005 for customers to define while ordering.

** X front door selection: customers to define while ordering, "X=1,2" configuration is defining front door structure, please see front door selection on drawings at page 11.

10" NETbox SOHO Network Wall Mounting Cabinets

Width: 312 mm
Depth: 300 mm

Door Options

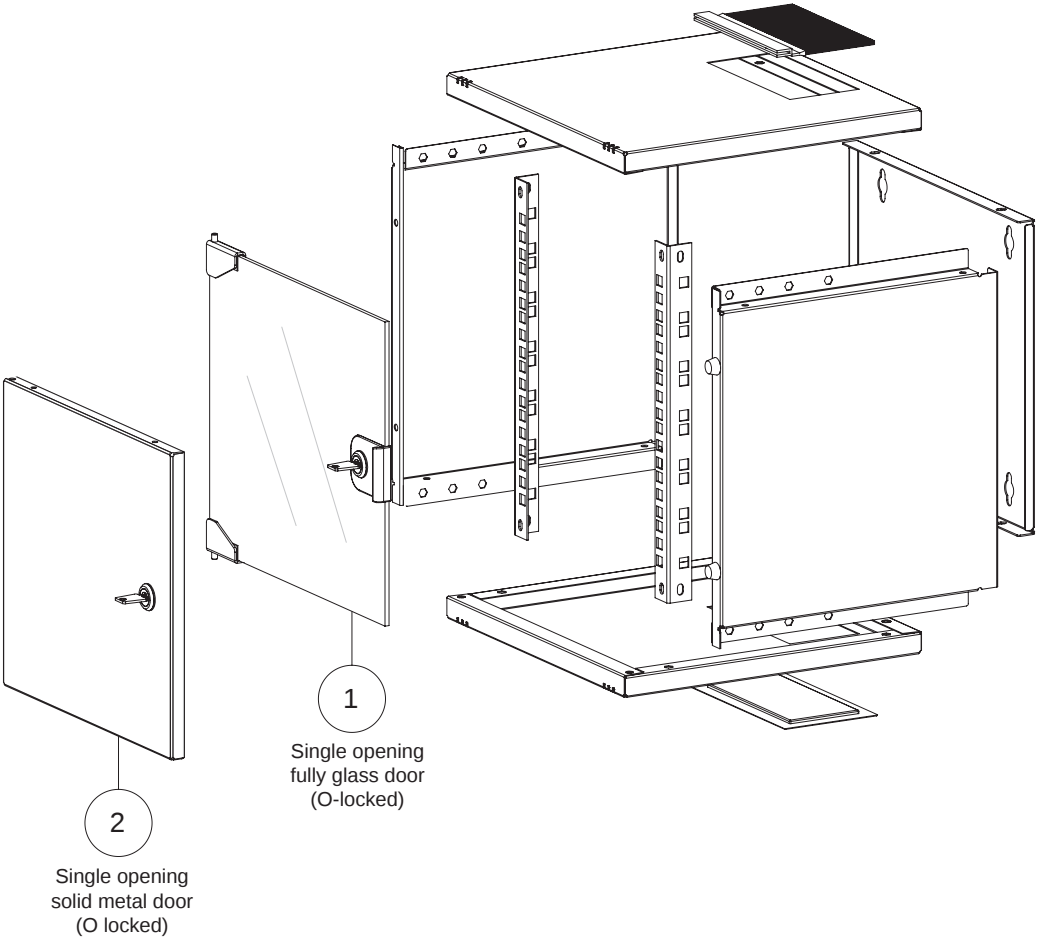

LN-AA - XXU - WW - DD - CC	X
LN: Corporate codification beginning letters mentioning Lande in Short Format as LN AA: Family group of enclosure; SH for small office home office range XX: Numeric character defining the height of enclosures, depending on model differences 06 and 09 to be selected from price list, website or catalogue U: U height alphanumeric notation, concrete (non editable- fixed character) WW: The first 2 digits of the width info, 30 for W=312 mm cabinets DD: The first 2 digits of the depth info, 30 for D=300 mm cabinets. CC: Color code, LG for Light Grey RAL 7035, BL for Black RAL 9005	1: Full Glass Front Door 2: Solid Metal Front Door

10U 10" and 5U 19" Combi SOHO Network Wall Mounting Cabinet

Width: 350 mm
Depth: 350 mm

Load Capacity: 30 kgs.

10U 10" and 5U 19" Combi SOHO Network Wall Mounting Cabinet

Standards and Compliances:



ISO 9001
Quality Management System

EN 61587-1
Mechanical Structures for
Electronic Equipment

EN IEC 60297, 19" Mounting
EN IEC 60917 Overall Cabinet
Dimensions

EN/IEC 60529 - IP20 Ingress Protection
performance

EN/IEC 62262 - IK07 Mechanical
Impact Resistance

EIA/ ECA-310 (D/E) 19" 482,6 mm
and U 44,45 mm Height Sizing



CE conform to
EN 60950-1
Information Technology
Equipment, Safety,
Part-1: General Requirement

EN IEC 62368-1 Audio/Video, Information
and Communication Technology Equipment
Part 1: Safety requirements



UL listed to
UL 2416, Outline of Investigation for
Audio/Video, Information and
Communication Technology Equipment
Cabinet, Enclosure and Rack
Systems; UL 60950-1 and CSA C22.2
NO. 60950-1-07, Information Technology
Equipment Safety
Part 1: General Requirements



Environment Friendly;
ISO 14001 Environmental
Management System
RoHS compliancy
%100 Recyclable Material

Standard Colors:



RAL 7035 Light Grey



RAL 9005 Black



The cabinet has both 19" and 10" mounting distances on it while 19" used max 5U rack space can be used, if 10" application is performed cabinet provides 10U rack space for assembly on the frontal assembled 19"/10" rails. However on rear monoblock frame where the cabinet is hanged on the wall has again 10U and 10" rack space, that means up to 6 cm deep 10" devices can be installed on rear frame while frontal frame installation is 19".

10U 10" and 5U 19" Combi SOHO Network Wall Mounting Cabinet

Width: 350 mm
Depth: 350 mm

Construction Details

Framework- Top/Bottom Cases:

Multi folded automated bending technology applied framework and top/bottom cases, provides a heavy duty structure results to high load capacity of: 30 kgs on wall nominal load.

Monoblock multi folded top and bottom cases resulted to a very heavy construction, tightly fixed to the framework with fixing hardware, fully modular system generated.

Top case and bottom case has pre-punched micro-joint cable entry w190x60 mm size, allows proper cabling insertion as well preventing the dust entry.

Top case has punched ventilation fan housing slots can provide passive ventilation to the cabinet as well single fan unit with or without thermostat control unit can be integrated.

Rear panel has pre-punched micro-joint cable entry location size W210xD60 mm.

The full length smoked, shatterproof, antistatic, 4,0 mm thickness glass with single point locking barrel lock is standard shipping configuration.

Front door opening direction is set right to left, but reversible to left to right at site with removing the hinge system. Hinge system is channel type with screws.

Side panels are openable with the function of PULL and RELEASE PINs. which are locking quick-fit side panels. Accessible by the authorized person only when the front door key lock is opened. Side panels can be removed during installation or maintenance.

The cabinet has both 19" and 10" mounting distances on it while 19" used max 5U rack space can be used, if 10" application is performed cabinet provides 10U rack space for assembly on the frontal assembled 19"/10" rails. However on rear monoblock frame where the cabinet is hanged on the wall has again 10U and 10" rack space, that means up to 6 cm deep 10" devices can be installed on rear frame while frontal frame installation is 19".


Available / Stocked Combi-SOHO Network Wall Cabinets are in RAL 7035 Light Grey and Black RAL 9005 colors.

Combi-SOHO Network Wall Cabinets has as an accessory sticky colour changing thermometer, range 20°C to 40°C as an accessory.




10U 10" and 5U 19" Combi SOHO Network Wall Mounting Cabinet


Width: 350 mm
Depth: 350 mm

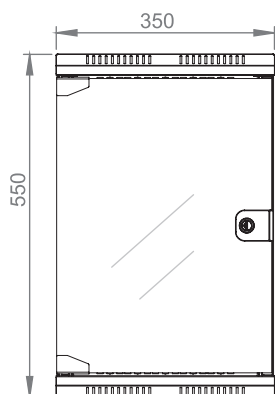


Front view

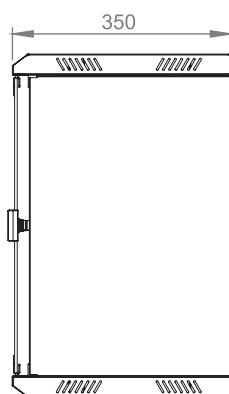


Side view

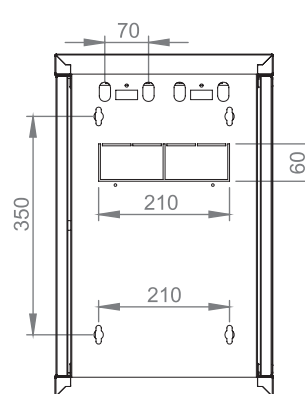


Rear view

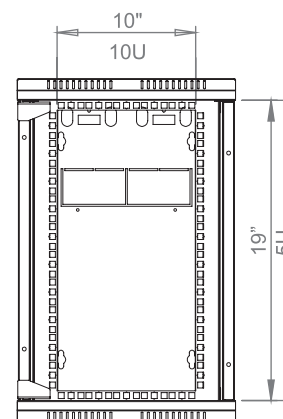


Inside front view

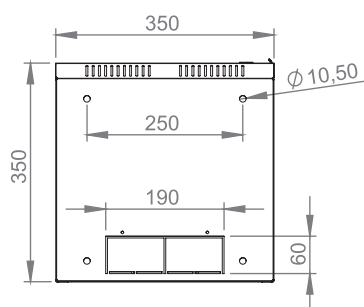

Top view

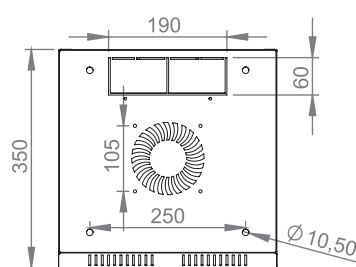

Bottom view

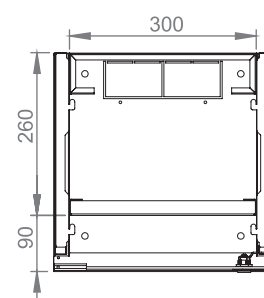

Inside bottom view

10U 10" and 5U 19" Combi SOHO Series Wall Mounting Cabinets W=350 mm D=350 mm

**Product Number	Product Description	Size WxDxH mm	h Size in U	h in mm	H mm, overall	Ah Wall Mounting h mm	Width Overall mm	Width Rail to Rear Door	Depth Overall mm	*Depth Shipping Conf. Rail to Rear Panel mm	QTY IN PACKAGE	PACKING DIMENSIONS WxDxH mm	Standard NET Weight of Product kgs	Gross Weight of Product kgs	QTY IN PALLET	PALLET DIMENSIONS WxDxH mm	Pallet Weight kgs
LN-PW10U3535-CC	10U 10" and 5U 19" Combi SOHO Network Wall Mounting Cabinet	350x350x550	10" 10U 19" 5U	444 222	550	350	350	Horizontal 10" Vertical 19"	350	210	1	410x610x420	9,5	11	25	1100x1300x2250	293

* See min and max adjustable depth variations on drawings.

** CC= LG for Light Grey RAL 7035 & BL for Black RAL 9005 for customers to define while ordering.

19" and 10" NETbox SOHO Network Wall Mounting Cabinets

Frequent Used Accessorries



The Shelf is front mount assembly to the equipment mounting rails. Universal fitting so Multivendor, the shelves are manufactured with ventilation slots allowing the convection of heated air inside cabinets, supply is in RAL 9005 Black and RAL 7035 Light Grey colors. Material steel with high Load capacity 15 kgs.

19" and 10" NETbox SOHO Wall Mounting Cabinet - 2 Point Fixed Shelves

* Part Number	19" NETbox Soho				10" NETbox Soho	10U 10" - 5U 19" Combi SOHO
	w:540 x d:300 mm	w:540 x d:400 mm	w:540 x d:500 mm	w:540 x d:600 mm	w:312 x d:300 mm	w:350 x d:350 mm
LN-RAF-RMO-1U20-CC	✓	✓	✓	✓	-	-
LN-RAF-RMO-1U25-CC	-	✓	✓	✓	-	-
LN-RAF-RMO-1U30-CC	-	✓	✓	✓	-	-
LN-RAF-RMO-1U40-CC	-	✓	✓	✓	-	-
LN-RAF-RMO-2U35-CC	-	✓	✓	✓	-	-

* CC is color code: please insert BL for Black and LG for Light Grey on the part numbers while creating order.

Ready assembled, plug and play with 0-35°C operating analog thermostat switch and plugs. Each fan has an air flow capacity of 2,3-3 cbm/min. Fan technical data: 18/17 W, 220/240 VAC, 50/60 Hz, 013/0,11 A, 2300/3000 rpm 42 dB noise level, fan life: 50.000 hours.



19" and 10" NETbox SOHO Wall Mounting Cabinet - Fan Modules

* Part Number	19" NETbox Soho				10" NETbox Soho	10U 10" - 5U 19" Combi SOHO
	w:540 x d:300 mm	w:540 x d:400 mm	w:540 x d:500 mm	w:540 x d:600 mm	w:312 x d:300 mm	w:350 x d:350 mm
LN-FAN-ONF-1FWM-CC	✓	✓	✓	✓	-	-
LN-FAN-ONF-2FWM-CC	✓	✓	✓	✓	-	-
LN-FAN-THM-1FWM-CC	✓	✓	✓	✓	-	-
LN-FAN-THM-2FWM-CC	✓	✓	✓	✓	-	-

*CC is color code: please insert BL for Black and LG for Light Grey on the part numbers while creating order.



Horizontal cable management panels are for the cable management inside the cabinet, with the intend of carrying the cables into the final connection point. 1U 19" with 5 rings and 1U 10" 3 rings. Supply is in RAL 9005 Black and RAL 7035 Light Grey colors.

19" and 10" NETbox SOHO Wall Mounting Cabinet - Horizontal Cable Management

* Part Number	19" NETbox Soho				10" NETbox Soho	10U 10" - 5U 19" Combi SOHO
	w:540 x d:300 mm	w:540 x d:400 mm	w:540 x d:500 mm	w:540 x d:600 mm	w:312 x d:300 mm	w:350 x d:350 mm
LN-KDG-YKD-1UKN-CC	✓	✓	✓	✓	-	✓

* CC is color code: please insert BL for Black and LG for Light Grey on the part numbers while creating order.

19" and 10" NETbox SOHO Network Wall Mounting Cabinets

Frequent Used Accessorries



PDU 6xDIN49440 socket Schuko power strip, 19" 1U, aluminium housing, 1x16A cct breaker, 4000 Watt, 250V AC, 3x1.5mm², 2,5m cable, DIN 49441 plug, CE approval.

PDU 6xBS1363 UK socket power strip, 19" 1U, aluminium housing, 16A illuminated on/off switched, 3250 Watt, 250V AC, 3x1.5mm², 2,5m cable, 13A BS1363 plug, CE approval

19" and 10" NETbox SOHO Wall Mounting Cabinet - Power Distribution Unit						
* Part Number	19" NETbox Soho				10" NETbox Soho	10U 10" - 5U 19" Combi SOHO
	w:540 x d:300 mm	w:540 x d:400 mm	w:540 x d:500 mm	w:540 x d:600 mm	w:312 x d:300 mm	w:350 x d:350 mm
LN-PRZ-SGT-1U6P-SC	✓	✓	✓	✓	-	✓
LN-PRZ-ONF-1U6P-UK	✓	✓	✓	✓	-	✓




M6 steel caged nut set, screw and nuts included, 8 pcs set, 20 pcs set and 50 pcs set.

19" and 10" NETbox SOHO Wall Mounting Cabinet - Mounting Hardware						
* Part Number	19" NETbox Soho				10" NETbox Soho	10U 10" - 5U 19" Combi SOHO
	w:540 x d:300 mm	w:540 x d:400 mm	w:540 x d:500 mm	w:540 x d:600 mm	w:312 x d:300 mm	w:350 x d:350 mm
LN-DGR-KFS-M608-XX	✓	✓	✓	✓	✓	✓
LN-DGR-KFS-M620-XX	✓	✓	✓	✓	✓	✓
LN-DGR-KFS-M650-XX	✓	✓	✓	✓	✓	✓



19" and 10" NETbox SOHO Wall Mounting Cabinet - 1U 10" Blank Panel						
* Part Number	19" NETbox Soho				10" NETbox Soho	10U 10" - 5U 19" Combi-SOHO
	w:540 x d:300 mm	w:540 x d:400 mm	w:540 x d:500 mm	w:540 x d:600 mm	w:312 x d:300 mm	w:350 x d:350 mm
LN-PNL-KPN-1U10-CC	-	-	-	-	✓	✓

* CC is color code: please insert BL for Black and LG for Light Grey on the part numbers while creating order.



1U patch panel empty for RJ45 keystone jacks.

19" and 10" NETbox SOHO Wall Mounting Cabinet - 1U Patch Panel						
* Part Number	19" NETbox Soho				10" NETbox Soho	10U 10" - 5U 19" Combi-SOHO
	w:540 x d:300 mm	w:540 x d:400 mm	w:540 x d:500 mm	w:540 x d:600 mm	w:312 x d:300 mm	w:350 x d:350 mm
LN-PNL-SPP-1U8P-CC	-	-	-	-	✓	✓

* CC is color code: please insert BL for Black and LG for Light Grey on the part numbers while creating order.

19" and 10" NETbox SOHO Network Wall Mounting Cabinets

Frequent Used Accessories



3xDIN49440 socket schuko power strip, 10" 1U, aluminium housing, 16A illuminated on/off switched, 4000 Watt, 250V AC, 3x1.5mm², 2,5m cable, DIN 49441 plug, CE approval.

3xBS1363 UK socket power strip, 10" 1U, aluminium housing, 16A illuminated on/off switched, 3250Watt, 250V AC, 3x1.5mm², 2,5m cable, 13A BS1363 plug, CE approval.

19" and 10" NETbox SOHO Wall Mounting Cabinet - Power Distribution Unit

* Part Number	19" NETbox Soho				10" NETbox Soho	10U 10" - 5U 19" Combi-SOHO
	w:540 x d:300 mm	w:540 x d:400 mm	w:540 x d:500 mm	w:540 x d:600 mm	w:312 x d:300 mm	w:350 x d:350 mm
LN-PRZ-ONF-1U3P-SC	-	-	-	-	✓	✓
LN-PRZ-ONF-1U3P-UK	-	-	-	-	✓	✓



19" and 10" NETbox SOHO Wall Mounting Cabinet - 1U 10" Shelf D=150 mm

* Part Number	19" NETbox Soho				10" NETbox Soho	10U 10" - 5U 19" Combi-SOHO
	w:540 x d:300 mm	w:540 x d:400 mm	w:540 x d:500 mm	w:540 x d:600 mm	w:312 x d:300 mm	w:350 x d:350 mm
LN-SBT-RMO-1U10-CC	-	-	-	-	✓	✓

* CC is color code: please insert BL for Black and LG for Light Grey on the part numbers while creating order.



19" and 10" NETbox SOHO Wall Mounting Cabinet - Horizontal Cable Management

* Part Number	19" NETbox Soho				10" NETbox Soho	10U 10" - 5U 19" Combi-SOHO
	w:540 x d:300 mm	w:540 x d:400 mm	w:540 x d:500 mm	w:540 x d:600 mm	w:312 x d:300 mm	w:350 x d:350 mm
LN-KDG-YKD-1U10-CC	-	-	-	-	✓	✓

* CC is color code: please insert BL for Black and LG for Light Grey on the part numbers while creating order.



1/2U 10" cable management panel brushed, for patchcord entry opening.

19" and 10" NETbox SOHO Wall Mounting Cabinet - 1/2 10" Cable Management Panel Brushed

* Part Number	19" NETbox Soho				10" NETbox Soho	10U 10" - 5U 19" Combi-SOHO
	w:540 x d:300 mm	w:540 x d:400 mm	w:540 x d:500 mm	w:540 x d:600 mm	w:312 x d:300 mm	w:350 x d:350 mm
LN-KDG-YKD-05FC10-CC	-	-	-	-	✓	✓

* CC is color code: please insert BL for Black and LG for Light Grey on the part numbers while creating order.



CONTACT DETAILS

Headquarters

Address:

Merve Mah. Gazi Cad. No: 17 **Phone:** +90 216 312 26 53
Sancaktepe - İstanbul / TURKEY **Fax** : +90 216 312 09 09

Factory

Address:

20. Cadde No: 14 Eskişehir **Phone:** +90 222 236 24 66 pbx
Organize San. Bölge. 26110 **Fax** : +90 222 236 13 53
Eskişehir / TURKEY

www.lande.com.tr | sales@lande.com.tr

